Allied Data Publication 34

(ADatP-34(F))

NATO Interoperability Standards and Profiles

Volume 2

Near Term

19 January 2012

C3B Interoperability Profiles Capability Team

Table of Contents

1. Introduction 1
1.1. Scope 1
2. Reference Models: Transition from Platform Centric to Service Oriented Models
3. Standards 5
3.1. Introduction
3.1.1. Releasability Statement 6
3.2. Operational Mission/Activities/Tasks 6
3.2.1. List of Standards 6
3.3. User Information Services
3.3.1. List of Standards 7
3.4. Technical Services 7
3.4.1. List of COI Standards 8
3.4.2. List of Information Integration Standards
3.4.3. List of Communications Standards
3.5. Information Assurance
3.5.1. List of Standards
3.6. Service Management and Control
4. Profiles 103
4.1. Introduction
4.1.1. Profiles derived from NATO Operations 103
4.1.2. Profiles derived from NATO member nations 103
4.2. Profile Specifications 103
4.2.1. NRF Generic Interface Profile 104
4.2.2. Tactical ESB - Profile
4.2.3. AMN - Profile
A. Technologies 105
A.1. Data Strategy 105
A.1.1. Data Strategy 105
A.1.2. Data Management 105
A.1.3. JC3IEDM 105
A.1.4. NATO Discovery Metadata Specification (NDMS) 105
A.1.5. Extensible Markup Language (XML) 106
A.2. Information Modelling 107
A.3. Network Infrastructure
A.3.1. Background 108
A.3.2. NGCS 2007 Target Architecture 109
A.3.3. Communications & Networking 109
A.3.4. Construction of a robust IP-network infrastructure
Index 113

List of Figures

A.1. NDMS Usage Conceptual Diagram	106
A.2. NGCS Digital User-Network Access Reference Configuration	109
A.3. Roadmap to IPv6	112

<u>1. INTRODUCTION</u>

001. Volume 2 of the NISP focuses on interoperability standards and profiles in the near-term or a timeframe of 0 to 2 years into the future. This is the short-term step describing the state-of-the-art of NATO systems today and the framework for new systems actually under procurement or specification. For new systems, it describes the initial step towards the NII.

002. The Combined Communications Electronics Board (CCEB) nations will use NISP Volume 2 Chapter 3, Section 3.2, Section 3.3, Section 3.4, Section 3.5 and Section 3.6 tables to publish the interoperability standards for the CCEB under the provisions of the NATO-CCEB List of Understandings (LoU) detailed in Volume 1 Annex A. For the CCEB Chapter 4 is only applicable to the CCEB Nations when taking part in NATO lead operations.

<u>1.1. SCOPE</u>

003. The scope of this volume will include:

- Identifying the standards, profiles and technologies that are relevant to a service oriented environment, as described in the NATO NNEC Technical Services Strategy,
- Describing the near term standards, profiles, and technologies to support the initial step towards NNEC Technical Services,
- Planning the transition of legacy systems.

2. REFERENCE MODELS: TRANSITION FROM PLATFORM CENTRIC TO SERVICE ORIENTED MODELS

004. Information technology is undergoing a fundamental shift from platform-oriented computing to network-oriented computing. Platform-oriented computing emerged with the widespread proliferation of personal computers and the global business environment. These factors and related technologies have created the conditions for the emergence of network-oriented computing. This shift from platform to network is what enables the more flexible and more dynamic network-oriented operation. The shift from viewing partners as independent to viewing partners as part of a continuously adapting ecosystem fosters a rich information sharing environment.

005. This shift is most obvious in the explosive growth of the Internet, intranets, and extranets. Internet users no doubt will recognize transmission control protocol/internet protocol (TCP/ IP), hypertext transfer protocol (HTTP), hypertext markup language (HTML), Web browsers, search engines, and Java¹ Computing. These technologies, combined with high-volume, high-speed data access (enabled by the low-cost laser) and technologies for high-speed data networking (hubs and routers) have led to the emergence of network-oriented computing. Information "content" now can be created, distributed, and easily exploited across the extremely heterogeneous global computing environment. The "power" or "payoff" of network-enabled computing comes from information-intensive interactions between very large numbers of heterogeneous computational nodes in the network, where the network becomes the dynamic information grid established by interconnecting partners participating in a collaborative, coalition environment. At the structural level, network-enabled warfare requires an operational architecture to enable the common processes to be shared by all parties.

006. One of the major drivers for supporting net-enabled operations is Service-Oriented Architectures (SOA). SOA is an architectural style that leverages heterogeneity, and thus inherently platform-neutral. It is focused on the composition of Services into flexible processes and is more concerned with the Service interface and above (including composition metadata, security policy, and dynamic binding information), more so than what sits beneath the abstraction of the Service interface. SOA requires a different kind of platform, because runtime execution has different meanings within SOA. SOA enables business users and business process architects to compose Services into processes, and then manage and evolve those processes, in a declarative fashion. Runtime execution of such processes is therefore a metadata-centric operation of a different kind of platform -- a Service-oriented composite application platform.

007. Network-enabled operations are characterized by new concepts of speed of command and self-synchronization.

008. The most important SOA within an enterprise is the one that links all its systems. Existing platforms can be wrapped or extended in order to participate in a wider SOA environment. NATO use of the NISP will provide a template for new systems development, as well as assist in defining the path for existing systems to migrate towards net-enabled operations.

¹Registered Trademark of SUN Microsystems, INC.

3. STANDARDS

3.1. INTRODUCTION

009. This purpose of this chapter is to specify the NISP near term standards. The document organises these standards into five service areas and included service categories:

- Operational Mission/Activities/Tasks
- User Information Services
- Technical Services
 - COI Services
 - Generic COI Services
 - Specific COI Services
 - Information Integration
 - Core Enterprise Services
 - Discovery
 - Service Discovery Services
 - Information Discovery Services
 - Repository
 - Metadata Registry Services
 - Enterprise Directory Services
 - Mediation
 - Composition Services
 - Translation Services
 - Interaction
 - Messaging Services
 - Publish/Subscribe Services
 - Transaction Services
 - Collaboration Services
 - Infrastructure
 - Application Services
 - Storage Services
 - Communication Services
 - Network and Transport Services
 - Data Link and Connection Services
- Information Assurance
 - SMI Services
 - Confidentiality
 - Encryption
 - Integrity
 - Authentication
 - Detection
 - Transsec
- Service Management and Control

010. This section describes the role and requirements of each service area, and presents all associated standards in tabular form. The tables refine each service area into one or more service categories, with service components mapping to one or more mandatory, emerging near term or fading categories (see NISP vol. 1). A remarks column provides optional supplementary information on each standard plus CCEB-specific information.

<u>3.1.1. Releasability Statement</u>

011. In principle, NISP includes only standards/STANAGs/documents, which are generally available for NATO/Nato member nations/CCEB.

012. However, a subset of documents are only available for those nations/ organisations, who are joining a specific mission (e.g. ISAF) or are member of a special working group (I-ICWG). The membership in these activities is outside the scope of NISP.

3.2. OPERATIONAL MISSION/ACTIVITIES/TASKS

013. In the military organisations operational missions are generally planned activities that can be viewed in terms of distinct chronological stages of completion which in turn consist of shorter tasks. Operational missions do not involve combat (see combat mission, and can vary in duration from a few hours to several weeks, though usually in peacetime are limited to the working week.

014. This set of services is described in mission related terms to provide consistency with the set of possible NATO missions identified through the NATO Defense Planning Process (NDPP). Each Operational Service is dependent on one or more Information Services.

<u>3.2.1. List of Standards</u>

SERVICE CATEGORY	EGORY /	EMERGING NEAR TERM	Remarks

3.3. USER INFORMATION SERVICES

015. These services are hierarchically organised and focused on information: content, management, processes, and standards. Each Information Service is enabled by one or more NNEC Services.

016. These NNEC services represent the technology required to enable the Information Services to make information available to user communities of interest. At the lowest level, NNEC Services are composed of components, processes, management.

3.3.1. List of Standards

SUBAREA / SERVICE CATEGORY	EGORY	MANDAT- / ORY STAND- ARDS	EMERGING NEAR TERM	 Remarks

3.4. TECHNICAL SERVICES

017. Technical services provide fundamental support to service based frameworks both in the form of information integration and communication services, and in the form of COI independent general service building blocks.

018. COI services provide more specialized services in order to give the business more specific business benefits within a "domain" or "area of interest".

019. A COI is a collaborative group of users who have shared goals, interests, missions or business processes that result in information exchange and shared vocabulary.

020. Information services include services that are either made available to all users by the infrastructure, or are mandatory to be provided by all users, by all providers or by all consumers. Information services also include specification of services of general interest that may be voluntarily exchanged by any parties on the network.

021. Actually information services are based only on core enterprise services (CES), but may be extended in the future.

022. Any service based framework, such as the Business Process Infrastructure Framework (BPIF), needs to provide a basic set of services that support and facilitate implementation and deployment of actual business services and processes. Such basic services are usually referred to as Core Enterpise Services.

023. Here we will provide an overview of such CESs in a BPIF context in terms of the way such services are categorized. A few examples of CESs in each category is also provided, but a complete set of well defined core services cannot be provided as it to a large extent will depend on the actual implementation of the BPIF.

024. Core services in a BPIF context are divided into two main categories according to their primary role in the implementation of business services and processes.

<u>3.4.1. List of COI Standards</u>

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
Generic COI Services				
Meteo				
Map View				
Map Mgmt				
Spatial Geo- graphy Visualisa- tion				
		Sensor Plan- ning Servicde (SPS) (OGC 09-000:2011)		
Document Man- agement				
	Joint Brevity Words Publica- tion (APP-7(E) Change 1, STANAG 1401 ed.14:2011)			
Specific COI Services				
Communicate and Inform				
Battlespace Mgmt				
Orbat Mgmt				
Overlay Mgmt				
	Additional milit- ary Layers for digital geospa- tial data products (AML), STANAG 7170 ed.2:2010			STANAG 7170 is the reference to the NATO Maritime Con- cepts standard and describes the product Addition-

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
				al Military Lay- ers. This stand- ard includes the Features, Attrib- utes and enumera- tions specified by AML, but not covered by the IHO S-57 version 3.1.2 (June 2009) Object Catalogue Once all required maritime defini- tions are included in DFDD/NG- FCD, reference to STANAG 7170 may be unneces- sary.
	DIGEST V2.0 and DIGEST V2.1, STANAG 7074 ed.2:1998, AgeoP-3 (VMaps, USRP, ASRP)			IGEOWG is in the pro- cess of imple- menting DFDD as a STANAG called the NG- FCD (NATO Geospatial Fea- ture Concept Dic- tionary). The IG- EOWG will reg- ulate any propos- als that DGIWG may put forward with respect to DIGEST replace- ments. For CCEB in- teroperability the

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	STANDARDS	EMERGING NEAR TERM	FADING	Remarks
				ard is DGIWG Feature Data Dir- ectory (DFDD) 2006 and DI- GEST v2.1 is fad- ing
	Vector Product Format (VPF) (DoD, Mil-Std. 2407:1996)			
	Vector Map (VMap) Level 1 (STANAG 7163:2003)			
	NetCDF v1.0 OGC 10-090r3 (OGC:2011)			
	GeoPDF OGC 08-139r3 (OGC:2011)			
	Geospatial Sym- bols for Digit- al Displays (Geo- Sym) (NIMA:2000)			
	DTED (STANAG 3809 ed.4:2006)			Digital Terrain Elevation Ex- change Format STANAG 3809 is based on US MIL- PRF-89020B, Di- gital Terrain El- evation Data (DTED), dated 23 May 2000. The USA, cus- todians of DTED,

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	STANDARDS	EMERGING NEAR TERM	FADING	Remarks
				are working with the DGIWG to define and devel- op appropriate re- placement stand- ards for the ex- change format in order to address new and emer- ging elevation re- quirements. Used in Profile: AMN
Meteo Svc				
	Specifications for Naval Mine War- fare Information and for Data Transfer - AMP 11 (STANAG 1116 ed.9:2010)			For CCEB in- teroperability this standard is not ap- plicable
	NATO Hand- book of Mil- itary Ocean- ographic In- formation and Services(STANAC 1171 ed.9:2008)			For CCEB in- teroperability this standard is only applicable for NATO lead oper- ations
	NATO Oceano- graphic Data Ex- change Format (STANAG 1317 ed.3:2008)			For CCEB in- teroperability this standard is only applicable for NATO lead oper- ations
	Interoperability between Nav- al Mine War- fare Data Centres			For CCEB in- teroperability this standard is not ap- plicable

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	STANDARDS	EMERGING NEAR TERM	FADING	Remarks
	(STANAG 1456 ed.2:2010)			
	Warning and Reporting and Haz- ard Prediction of Chemical, Bio- logical, Radiolo- gical and Nuc- lear Incidents (STANAG 2103 ed.10:2010)			For CCEB in- teroperability this standard is only applicable for NATO lead oper- ations
	Adoption of a Standard Bal- listic Meteoro- logical Message (STANAG 4061 ed.4:2000)			For CCEB in- teroperability this standard is only applicable for NATO lead oper- ations
	Computer Met- eorological Mes- sage (STANAG	Standard Artillery Computer Met-		For CCEB in- teroperability this standard is only applicable for NATO lead oper- ations
	Format of Re- quests for Met- eorological Mes- sages for Ballistic and Special Pur- poses (STANAG 4103 ed.4:2001)			For CCEB in- teroperability this standard is only applicable for NATO lead oper- ations
	Adoption of a Standard Target Acquisition Met- eorological Mes- sage (STANAG 4140 ed.2:2001)			For CCEB in- teroperability this standard is only applicable for NATO lead oper- ations

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
	NATO Meteor- ological Codes Manual (STANAG 6015 ed.4:2005)			For CCEB in- teroperability this standard is only applicable for NATO lead oper- ations
	Adoption of a Standard Grid- ded Data Meteor- ological Message (STANAG 6022 ed.2:2010)			For CCEB in- teroperability this standard is only applicable for NATO lead oper- ations
	Binary Univer- sal Form for the Representa- tion of meteoro- logical data (BU- FR) (WMO FM 94:2002)			
Symbol Mgmt				
Tracking				
		NFFI, STANAG 5527 (study)		Until the de- veloment of STANAG 5527 is more stable, doc- ument AC/322(SC/5) N(2006)0025 should be used.
				For CCEB in- teroperability this standard is not ap- plicable.
				Used in Profile: AMN
Synchronisation				

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
Distribution				
Notification				
Aggregation				
Collaborate and Plan				
Plan Workspace				
Plan Analysis				
Plan Briefing				
Plan Replay				
Plan Synchron- isation				
Plan Collabora- tion				
	Military Mes- saging (STANAG 4406 Ed.2:2006)		ACP120 replaced by ACP145	This includes PCT (protected content type). PCT may be used for protection of data objects in systems. For CCEB in- teroperability the mandatory stand- ard is ACP145 (Gateway-to- Gateway Mes- saging Protocols)
Simulation				
Collaboration analysis				
Sense and Re- spond				
Tasking				

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	MANDATORY STANDARDS	EMERGING NEAR TERM	FADING	Remarks
Plan Deviation Monitor				
JCOP				
Logistics Svcs				
	RFID Application Interface, ISO 15961:2004			
	RFID Data En- coding Rules, ISO 15962:2004			
	RFID - Freight containers, ISO 17363:2007			
	RFID - Re- turnable trans- port items, ISO 17364:2009			
	RFID - Trans- port units, ISO 17365:2009			
	RFID - Product packaging, ISO 17366:2009			
	RFID - Product tagging, ISO 17367:2009			
Supply Chain Svcs				
		OAGIS 9.4.1:2009, OAGi		
		PLCS, ISO 10303-239:2005		
		S1000D issue 4:2008, ASD- AIA-ATA		

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	STANDARDS	EMERGING NEAR TERM	FADING	Remarks
	S2000M issue 4:2005, ASD- AIA-ATA			
	NATO Policy for Systems Life Cycle Mg- mt (SLCM), C- M(2005)0108			SLCM is primar- ily based on AAP 48 and ISO/IEC 15288

3.4.2. List of Information Integration Standards

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
Core Enterprise Services				
		WS-Policy v1.5:2007 (OAS- IS)		
Discovery				
Service Discovery Services				
	Universal De- scription, Discov- ery and Integra- tion (UDDI) v2.0, W3C	UDDI v3.0, W3C		UDDI 2.0 provides a plat- form-independent way of describ- ing- and disover- ing service. For CCEB interoper- ability UDDI 3.0 is mandatory. Used in Pro- files: AMN, tact- ESB (v2.03)
		UDDI API Spec v.2, OASIS:2002		Used in Profile: tactESB

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	MANDATORY STANDARDS	EMERGING NEAR TERM	FADING	Remarks
	Electronic Busi- ness Extensible Markup Lan- guage (ebXML) ISO/TS 15000-1:2004, -2:2004, -3:2004, -4:2004, -5:2005			ebXML is a suite of specifications for standardizing XML based busi- ness messages to facilitate trading between organ- isation. Used in Profile:
		ebXML Mes- saging Service v. 2:2002 (OASIS)		AMN (v3.0)
	ebRIM v3.0, OASIS			ebXML Registry Information Mod- el
				Used in Profile: AMN
		TIDE Service Discovery, v.2.2.0:2008 (ACT)		Used in Profile: AMN
		Resource De- scription Frame- work (RDF):2004 (W3C)		Part of TIDE spe- cification at ACT. For CCEB in- teroperability this standard is not ap- plicable.
		Protocol and RDF Query Lan- guage (SPAR- QL):2008 (W3C)		Part of TIDE spe- cification at ACT. For CCEB in- teroperability this standard is not ap- plicable.
		DNS Service Dis- vovery (DNS-		Part of TIDE spe- cification at ACT.

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
		SD):2010 (ACT TIDE)		For CCEB in- teroperability this standard is not ap- plicable.
Information Dis- covery Services				
		WS-Metadata Ex- change:2010, W3C		
		Web Ontology Language (OWL):2009, W3C		Part of TIDE spe- cification at ACT. For CCEB in- teroperability this standard is not ap- plicable.
		ISAF Minimum Metadata Imple- mentation Policy (NATO:2010)		Used in profile: AMN
Repository				
	NC3 Repository			Common repos- itory for stand- ard data ele- ments and their related tool for the NATO Cor- porate Data Mod- el for Data Ad- ministration. See also XML.
				As this is cur- rently not a form- al standard, this entry is under fur- ther consideration within the NC3B.

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
				For CCEB in- teroperability this standard is par- tially applicable
				Used in Profile: AMN
Metadata Re- gistry Services				
		NATO Metadata Registry and Re- pository (NMRR) (NC3A TN-1313:2008)		For CCEB in- teroperability this standard is not ap- plicable.
Enterprise Dir- ectory Services				
	Common Direct- ory Services and Procedures (ACP 133D:2009)		ACP 133B	Contains a com- mon directorys- chema.
	Common Dir- ectory Services and Proced- ures Supplement (ACP 133 Sup- pl.1:2009)			
	LDAP v3 (NATO LDAP Profile)			LDAP is an IETF protocol and close to a function- al subset of DAP. Many Web- browsers can act as LDAP clients, which is highly desirable.
				Used in Profile: AMN

MANDATORY STANDARDS	EMERGING NEAR TERM	FADING	Remarks
	LDAP: String Representation of Distinguished Names:2006 (IETF)		
LDIF (IETF RFC 2849:2000)			LDIF defines a flexible and al- most universally accepted means of exchanging directory inform- ation via flat files.
		DSP (ITU-T X.500:2008)	DSP defines X.500 server to server communic- ation, including chaining. For CCEB in- teroperability this standard is not ap- plicable
		DSIP (ITU-T X.500:2008)	DISP defines X.500 based in- formation shad- owing/replica- tion.
			For CCEB in- teroperability this standard is not ap- plicable
		DOP (ITU-T X.500:2008)	Contains opera- tional manage- ment. For CCEB in-
	STANDARDS	STANDARDSNEAR TERMLDAP:String Representation of Distinguished Names:2006 (IETF)LDIF (IETF RFC	STANDARDSNEAR TERMLDAP:String Representation of Distinguished Names:2006 (IETF)LDIF (IETF RFC 2849:2000)STANDARDCLDIF (IETF RFC 2849:2000)DSP (ITU-T X.500:2008)LDIF (IETF RFC 2849:2000)DSP (ITU-T X.500:2008)LDIF (IETF RFC 2849:2000)DSIP (ITU-T X.500:2008)LDIF (IETF RFC 2849:2000)DSIP (ITU-T X.500:2008)

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	MANDATORY STANDARDS	EMERGING NEAR TERM	FADING	Remarks
				standard is not ap- plicable
Mediation				
	SQL 3 (ISO/ IEC 9075(-1 to -14):2008)		Full Level and ISO/IEC 9075:1999 can- celed, new Ver- sion ISO/IEC 9075(-1 to -14):2008, Parts 1, 2 and 11 en- compass the min- imum require- ments of the language. Other parts define ex- tensions.	
	ODMG 3.0:2000 (ODMG)			
	ODBC 3.8 (MS)			
	JAVA DBC ver- sion 4.1:2006 (JDBC)		JDBC separated from ODBC	
	Distributed RDA (DRDA), v.5 (The Open Group)			
	SQL CLI (ISO/ IEC 9075-3:2008)			
		C2 Information Exchange Data Model (C2IEDM) and Data Ex- change Mechan- ism (DEM)		Used in Profile: AMN

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	STANDARDS	EMERGING NEAR TERM	FADING	Remarks
	DEM Data Rep- lication Mechan- ism from MIP baseline 3:2009			Used in Profile AMN
			NATO Corporate Data Model v2 (ADatP-32)	
		ASTERIX, ed.1 (ADatP-35:2010)		This profile is based on AD atP-35 and a cor responding series of EUROCON TROL specifica tions For CCEB in teroperability this profile is only applicable fo NATO lead oper ations.
	Spatial Schema ISO 19107:2003, DGI- WG/TSMAD profiles of ISO 19107			ISO 1910' provides conceptual schemas for describing and manipulating the spatial character istics of geo graphic features. The DGI
				WG/TSMAD profiles are in tended to define sub-schemas o ISO 19107 to be used for defining

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
				data interchange formats.
				For CCEB in- teroperability this standard is emer- ging
	Rules for applic- ation schema ISO 19109:2005			 ISO 19109 defines rules for creating and doc- umenting applica- tion schemas, in- cluding the prin- ciples for the definition of fea- tures. Required for Geo to en- sure consistency of use in the definition and use of the geographic features. For CCEB in- teroperability this standard is emer- cing
	Methodology for feature cata- loguing ISO 19110:2005			ging ISO 19110 defines the meth- odology for cata- loguing feature types and spe- cifies how the classification of feature types is organized into a feature catalogue and presented to the user of a set of geographic data.

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	STANDARDS	EMERGING NEAR TERM	FADING	Remarks
				For CCEB in- teroperability this standard is emer- ging
	Spatial Referen- cing by geograph- ic identifiers ISO 19112:2003			ISO19112definestheceptualschemaforspatialrefer-encesbasedongeographiciden-tifiers.Thisstand-ardardenablesgaz-etteerstobestructedinacon-sistentsistentmanner.ForCCEBin-teroperabilitythisstandardstandardisemerging
	Simple Feature Access, ISO 19125-1:2004 and ISO 19125-2:2004			 ISO 19125-1 establishes a common architecture for geographic information (simple feature profile of ISO 19107) and defines terms to use within the architecture. It also standardizes names and geometric definitions for Types for Geometry. ISO 19125-2 specifies and SQL schema that support storage, re-

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	STANDARDS	EMERGING NEAR TERM	FADING	Remarks
				trieval, query and update of simple geospatial feature collections via the SQL Call Level Interface (SQL/ CLI) and estab- lishes and archi- tecture for the im- plementation of feature tables. For CCEB in- teroperability this standard is emer- ging
	ation Exchange Data Model (JC3IEDM, STANAG 5525	(JC3IEDM, STANAG 5525 ed.1:2007) for the		C2IEDM re- placed by JC3IEDM. For CCEB JC3IEDM is man- datory for all en- vironments. Used in profile: AMN
	WebCGM (Web Computer Graph- ics Metafile), W3C REC 20011217, 2001		CGM (ISO/IEC 8632:1999) not for new systems	Primarily inten- ded for vec- tor-based images.
	SVG 1.2:2005 (W3C)			The preferred format to visual- ize maps in the Web browser.
	Mobile SVG Pro- files: SVG Tiny and SVG Ba-			SVG profiles for cellphones and PDAs

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
	sic, W3C REC 20030114, 2003			
	Tagged Image File Format for image techno- logy (TIFF) (ISO 12639:1998)			
		Vector Markup Language (VML), W3C Note 19980513, 1998 (W3C)		
		NVG - NATO Vector Graph- ics Protocol v.1.5:2010 (ACT)		Part of TIDE spe- cification at ACT. For CCEB in- teroperability this standard is not ap- plicable. Used in Profle:
	Geographical Tagged Image Format (GeoTIFF)			AMN Used in Profile: AMN
	Controlled Im- agery Base (CIB, STANAG 7099 ed.2:2004),			
	JPEG 2000 (ISO/ IEC 15444-1:2004, ISO/IEC 15444-2:2004, ISO/IEC 15444-3:2007, in- cluding Amd 2:2003, ISO/IEC			JPEG 2000 is the standard used to store ras- ter data (imagery, scanned maps, matrix data) and provides the abil- ity to include spa- tial referencing

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
	15444-4:2004, ISO/IEC 15444-5:2003, ISO/IEC 15444-6:2003,)			information with- in the standard. For CCEB inter- operability ISO/ IEC 15444-2 Cor. 3 is not applic- able.
		JPEG LS (ISO/ IEC 14495:2003)		Loss-less and near loss-less compression of continuous tone still images.
		Multiresolution seamless Image Database (MrSid Res. 2)		Used in Profile: AMN
		Enhanced Com- pressed Wavelet (ECW 3.3)		Used in Profile: AMN
	Compressed ARC Digitized Ras- ter Graphics (CADRG), STANAG 7098 ed.2:2004)			Used in Profile: AMN
		Raster product format (RPF) (NIMA):2010		Used in Profile: AMN
			GIF (version 89a) not for new sys- tems	Graphics Inter- change Format is intended for the on-line trans-mis- sion and inter- change of raster graphic data.
	PNG 1.0 (RFC 2083:1997)			Portable Network Graphics PNG

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	STANDARDS	EMERGING NEAR TERM	FADING	Remarks
				is in-tended for the com-pressed storage of ras- ter images. PNG provides a pat- ent-free replace- ment for GIF.
	Fax G.3, ITU-T T.4:2003			
		Fax Relay for IP Networks, ITU-T T.38:2010		
	TDF (STANAG 5000 ed.3:2006)			For CCEB in- teroperability the SCIP standard is mandatory
	ADatP-3(A), CONFORMETS (STANAG 5500, ed. 7:2010)			Used in Profile: AMN
	APP-11(C) Change 1, NATO Message Cata- logue (STANAG 7149 ed.5:2010)	APP-11(C) Change 2		APP-11 (STANAG 7149) as the single source for NATO Military Mes- sages for com- mand and control of NATO forces at all levels of the Chain of Com- mand down to and including in- dividual units.
				For CCEB in- teroperability the standard is MIL- STD 6040 and

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
				OTH-T GOLD standards
				Used in Profile: AMN
	veloping Com- mon Character Oriented MTFs for Use in Im- mediate Future	Interoperability of Low-Level Ground-based Air Defence Surveil- lance, Command and Control Sys- tems (STANAG 4312 Part I, ed.2:2009)		
	EDIFACT (ISO 9735:2002)			EDIFACT can be used to trans- fer business doc- uments such as purchase orders invoices, and electronic funds transfer informa- tion. ebXML is a UN standard
			GML v3.2 (ISO 19136:2007)	This OpenGIS Consortium re- commendation standard may be used as the transfer format between the FA providing the published opera- tional data (e.g COP) and the Core Map Applic- ation Server.

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
				For CCEB inter- operability GML 3.1 is emerging
				Used in Profile: AMN
		GML Simple Fea- ture Profile v2.0 (OGC:2010)		Used in Profile: AMN
	OpenGIS City Geography Markup Lan- guage (CityGML) v1.0 (OGC:2008)			Added in NISP v.6 through RFCP 5-46.
		Filter Encoding v2.0 (OGC:2010)		Used in Profile: AMN
		ESRI Shapefile Specification (ESRI:2008)		Used in Profile: AMN
	DLMS/DFAD1, Mil- PRF-89005:1994 (NGA)			DLMS/DFAD1 must be used until DI- GEST/VMAP 1 covers the whole world.
				For CCEB in- teroperability this standard is not ap- plicable
	World Geodetic System (WGS) 84			WGS specifies the set of parameters that define mathemat- ically the shape of the earth
	Geographic In-			This provides the
	formation -			most compre-

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
	Metadata - ISO 19115:2003			 hensive metadata specification for digital geographic data. This shall be used for the geo metadata which forms the foundation of the Core Geo Catalogue. It is likely that a NATO profile of this standard will have to be produced based on the DGIWG profile. For CCEB interoperability this standard is emerging Used in Profile:
	WECDIS (STANAG 4564 ed.2:2007)			AMN Standard for War- ship Electronic Chart Display and Information Sys- tems.
	SEDRIS (ISO/ IEC 18023-1:2006)			Environmental data representa- tion and inter- change specifica- tion
	EDCS (ISO/IEC 18025:2005)			Environmental data coding spe- cification
	SRM (ISO/IEC 18026:2009)			Spatial reference model

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
	Geodetic Projec- tions, STANAG 2211 ed.6:2001			
	Common Warfighting Symbology (Mil- Std 2525B)			For CCEB in- teroperability the mandatory stand- ard is MIL-STD 2525B COM- MON WARFIGHTING SYMBOLOGY and the emerging standard is MIL- STD 2525C Used in Profile: AMN
	Joint Symbology (APP-6(C)/ STANAG 2019 ed.6:2011)			For CCEB in- teroperability this standard is not ap- plicable. Used in Profile: AMN
	Telecommunica- tions Symbology (STANAG 5042 ed1:1978)			
		Portrayal ISO/ DIS 19117:2005		Currently in Draft. Interna- tional Standard specifies the in- terface to stand- ard symbol sets, not the symbols themselves.
			Symbols on Land Maps, Aeronaut- ical Charts and	For CCEB in- teroperability this

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	MANDATORY STANDARDS	EMERGING NEAR TERM	FADING	Remarks
			special Naval Charts (STANAG 3675 ed.2:2000)	standard is applic- able and fading.
	IHO S-100, 2000		IHO S-57	
	Web Map Service (WMS) Imple- mentation Spe- cification v.1.3:2006 (OGC 06-042)			Used as a means of distributing compiled map- ping data between applications.
				Used in Profile: AMN
		OpenGIS Styled Layer Descriptor Profile of the Web Map Ser- vice (SLD 1.1.0) (OGC 05-078r4)		Used in Profile: AMN
	Web Feature Service (WFS) v.2.0:2009 (OGC 09-025r1)			Used as a means of distributing geo feature (vec- tor) data between applications.
				For CCEB in- teroperability this standard is emer- ging
	Web Coverage Service (WCS) v.2.0:2010 (OGC 09-110r3)			Used as a means of distrib- uting geo cover- ages (raster) data between applica- tions.
				For CCEB in- teroperability this standard is emer- ging

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	EMERGING NEAR TERM	FADING	Remarks
			Used in Profile: AMN
	Web Coverage Service Imple- mentation Spe- cification v1.1.2 (OGC)		Used in Profile: AMN (v1.1.1)
	KeyholeMarkup Language (KML) v.2.2:2008 (OGC 07-147r2)		Used in Profile: AMN
	GML in JPEG 2000 for Geo- graphic Im- agery (GMLJP2) v.1.0.0 (OGC 05-047r3):2006		This evolving OGC standard describes min- imally required GML definition for georeferen- cing images and gives guidelines for augmenting that definition to address the ad- ditional encod- ing of metadata, features, annota- tions, styles, co- ordinate reference systems, and units of measure for data encoded in JP2K
	OGC GIS Web Terrain Service RFC v.05:2004		Used as a means to perform Web Service based Terrain analysis and communicate terrain data to cli- ents

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
		Catalogue Ser- vice for the Web (CSW) v.2.0.2 (OGC)		Used as a means of discovering geo metadata. Used in Profile: AMN
		CSW-ebRIM Re- gistry Service, Part 1: ebRIM profile for CSW v.1.0.1 (OGC)		Used in Profile: AMN
		OGC - ISO 19115:2003/ ISO 19119:2005 Ap- plication Profile for CSW 2.0		Describes the or- ganisation and implementation of Catalogue Ser- vices based on the ISO 19115 / ISO 19119 Ap- plication Profile
		Web Registry Service v.0.0.2:2001 (OGC Ref. 01-024r1)		Used as a means of publishing and finding geo ser- vices. As this standard is declared deprec- ated by OGC, the further inclusion of it in NISP is un- der consideration within the NC3B.
				For CCEB in- teroperability this standard is not ap- plicable
	OpenGL v4.0:2010			For CCEB in- teroperability this standard is not ap- plicable

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	STANDARDS	EMERGING NEAR TERM	FADING	Remarks
	Unified Mod- eling Language (UML) v2.2:2009 (OMG)			For CCEB in- teroperability this standard is not ap- plicable
		Unified Profile for DoDAF and MODAF (UPDM v.2):2008 (OMG)		For CCEB in- teroperability this standard is not ap- plicable.
	Codes for the representation of Currencies and Funds (ISO 4217:2008)			
	Letters for Geo- graphic Entities, STANAG 1059, ed.8:2005	graphic Entities,		For CCEB in- teroperability the country codes standard is ISO 3166 trigraphs ex- cept for military messaging - see CCEB COMAG Policy On Secur- ity Labelling Used in Profile: AMN (ed.9)
	ECMA Script Language Spe- cification (ECMA 262) ed.3:2009			Scripting required for enhanced Web pages For CCEB in- teroperability this standard is not ap- plicable
	ECMA Script XML Specifica- tion (ECMA 357) ed.3:2009			This sstandard adds native XML datatypes to the ECMA Script lan- guage.

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	STANDARDS	EMERGING NEAR TERM	FADING	Remarks
	Zip			Implementations of zip (e.g. Win- zip) also in- cludes gzip (RFC 1952:1996) and tar/compress
			7-bit Coded Char- acter-set for Info Exchange (AS- CII) (ISO/IEC 646:1991)	
			8-bit Single- Byte Coded Graphic Char Sets (ISO/IEC 8859-1-6,8-10:199 7:2003)	99;
	Universal Mul- tiple Octet Coded Char Set (UCS) - Part 1 (ISO/IEC 10646:2003)			
	NATO Standard Bar Code Sym- bology (STANAG 4329 ed.4:2010)			STANAG 4329 is a cover STANAG of ISO 16388:1999 - Bar code symbology specifications - Code 39.
	Bar code sym- bology specific- ation - Code 128 (ISO/IEC 15417:2007), Bar code print qual- ity test spe- cification -Lin-			

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
	ear symbols (ISO/ IEC 15416:2000)			
	Representation of Dates and Times (ISO 8601:2004)			
	Date and Time Formats (W3C NOTE- datetime:1998)			Used in Profile: AMN
	RFC 2045:1996	S/MIME ESS (IETF RFC 3850:2004, 3851:2004)		Base64 is in- cluded in RFC 2045:1996
		MIME Encapsu- lation of Aggreg- ate Documents, such as HTML (MHTML):1999 (IETF)		
Composition Ser- vices			<u> </u>	
Translation Ser- vices				

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
Interaction				
Messaging Ser- vices				
	Military Mes- saging (STANAG 4406 Ed.2:2006)		Use of PCT with- in STANAG 4406 is fading	Used for Form- al Messaging. STANAG 4406 contains the up- per layer protocol profile down to the requested Transport Ser- vice.
				For CCEB in- teroperability the mandatory stand- ard is ACP123A.
	Enhanced Secur- ity Services (ESS) for S/MIME, STANAG 4631 Ed.1:2008			STANAG 4631 contains an ad- ditional S/MIME profile for MMM- HS (in addition to PCT)
				For CCEB in- teroperability the mandatory stand- ard is ACP123A.
			X.400:1993 de- leted for informal messaging, as no concrete require- ment from MMH- SWG	
			Interoperability of telebrief- ing systems (STANAG 5059) deleted	

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
			Interoperability standards for tele- briefing systems (STANAG 4339) deleted	
	SMTP (IETF RFCs 1870:1995, 1985:1996, 2034:1996, 2920:2000, 3207:2002, 3461:2003 up- dated by 3798:2004, 3885:2004, 4954:2007, 5321:2008)			Used for interper- sonal messaging (email) Used in Profile: AMN
	POP3 (IETF RFC 1939:1996 up- dated by 1957:1996, 2449:1998)			For CCEB in- teroperability this standard is not ap- plicable
	IMAP4 (IETF RFC 3501:2003 updated by 4466:2006, 4469:2006, 4551:2006, 5032:2007, 5182:2008, 5738:2010)			For CCEB in- teroperability this standard is not ap- plicable
	ACP 145(A) - Interim Imple- mentation Guide for ACP 123/ STANAG 4406 Messaging Ser- vices Between			Provides gateway between ACP 123A messaging services. For CCEB in- teroperability this

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
	Nations - dated September 2008			standard is man- datory.
Publish/Sub- scribe Services				
Transaction Ser- vices				
Collaboration Services				
		XMPP (IETF RFC 3920:2004 - 3923:2004)		For CCEB in- teroperability this standard is man- datory
				Base profile in- cludes as exten- sions XEP-0184 and XEP-0202
				Used in Profile: AMN
	Packet-based Multimedia Comms Sys- tem (ITU-T H.323:2009)			Used in Profile: AMN
		Session Initial- isation Protocol (SIP) (IETF RFC 3261:2002, up- dated by 3265:2002, 3853:2004, 4320:2006, 4916:2007,		
		4916:2007, 5393:2008, 5621:2009, 5626:2009,		

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	MANDATORY STANDARDS	EMERGING NEAR TERM	FADING	Remarks
		5630:2009, 5922:2010)		
	Multinational Videoconferen- cing Services (ACP 220:2008)			
	Narrow-band visual telephone systems and ter- minal equipm- ment (ITU-T H.320:2004)			
	Media Gateway Control Pro- tocol v3(ITU-T H.248.1:2005)			Protocol for man- aging the multi- media gateways between circuit switched and packet switched networks.
	ITU Multi-point still image and Annotation Con- ference Pro- tocol Spec (ITU- T T.120:2007), T.126:2007 (Ref- erence to T.122 - T.125)			
	Data Protocols for Multimedia Con- ferencing (ITU- T T.120:2007, T.128:2008)			
Infrastructure		WS-Federation		
		(OASIS) Distributed Com- puting Envir-		

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
		onment (DCE) v1.1:1997 (OSF)		
		ONC RPC v.2 (IETF RFC 1831:1995)		
		DCE RPC v1.1:1997 (The Open Group)		
		Remote Proced- ure Call (MS- RPC:2003) (MS)		As part of MS Windows 2000 Interfaces
	X Window X11R7.5:2009, (X.Org) (see UI Svc)			
		DCE DFS v1.1:1997 (The Open Group)		
		X/Open Net- work File Sys- tem (XNFS) v.3W:1998 (The Open Group)		Includes RFC 1094:1989 (NFS 89) and RFC 1813:1995 (NFS95)
		Server Message Block (MS-SMB) v20100711:2010 (MS)		As part of MS Windows 2000
		DCE DTS v1.1:1995 (The Open Group)		DCE DTS uses TPI (Time Pro- vider Interface) to access oth- er distributed time services (such as NTP as mentioned under Comms Service).

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
		CORBA/IIOP 2.2:2009 (OMG)		
		RMI-IIOP 1.5.0:2005 (SUN)		
			MS-DCOM v.12.0:2010 (MS)	As part of MS Windows 2000 Interfaces; DCOM only in local environ- ment, not for out- side.
			teractive Sim- ulation (DIS)	For CCEB in- teroperability the mandatory stand- ard is IEEE Std 1278.1a:1998 STANAG 4482 should also be mi- grated to IEEE Std 1278:1998
		Modeling and Simulation High Level Architec- ture (HLA) (IEEE 1516:2000)		For CCEB in- teroperability this standard is man- datory
Application Ser- vices				
	FTP (IETF STD 9:1985,IETF RFC 0959:1985 updated by RFC 2228:1997, 2640:1999, 2773:2000, 3659:2007)			
		FTP Extensions for IPv6 and		

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
		NATs (IETF RFC 2428:1998)		
	Telnet (IETF STD 8:1983, IETF RFC 0854:1983 up- dated by 5198:2008, 0855:1983)			
	NetworkNewsTransferProtocolNNTP(IETFRFC 3977:2006)			
	Network Time Protocol (NTP) (RFC 1305:1992)			
	SimpleNet-workTimePro-tocol(SNTP)(RFC 2030:1996)			
			MPEG-1 (ISO/ IEC 11172:1996)	
	MPEG-2 (ISO/ IEC 13818:2000)			
	MPEG-4 (ISO/ IEC 14496:2004)			Encoding stand- ard for video con- ferencing
	CompactDiscFileSystem(CDFS)(ISO9660:1988)			For physical me- dia distribution (CD)
	Pulse Code Mod- ulation (PCM) (ISO/IEC 11172-3:1993, ITU-T G.711:1988)			PCM used for au- dio in ISDN Sys- tems

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	MANDATORY STANDARDS	EMERGING NEAR TERM	FADING	Remarks
	Differential PCM (ITU-T G.726:1990)			
			Delta-Modulation DM, EUROCOM D/0	
	GSM-Modulation (GSM 06.10, GSM 06.20 v.8.1.1:1999)			Used for mobile phones
		Voice Coding Al- gorithm (STANAG 4444 ed.1:1999).		Used for HF voice communic- ations as defined in STANAG 4444.
			Linear Predict- ive Coding-10 (STANAG 4198 ed.1:1984)	
	Code Excited Linear Prediction coding (CELP) (FS 1016:1991)			CELP is used military aircraft voice communic- ations in narrow band UHF net- works. CELP has higher throughput than LPC-10, but a lower range.
	Mixed Excitation Linear Predictive coding (MELPe) (STANAG 4591 ed.1:2008)			MELPe is used for HF voice com- munications in narrow band sys- tems.
			STANAG 4421 deleted as it is cancelled by NATO	

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	STANDARDS	EMERGING NEAR TERM	FADING	Remarks
	Parameters and Coding Standards for 800 bps. Di- gital Speech En- coder/Decoder (STANAG 4479 ed.1:2002)			For CCEB in- teroperability this standard is not ap- plicable
	SIMPLE (STANAG 5602 ed.3:2010)			SIMPLE provides specifications to interconnect ground rigs of all types for TDL interoperab- ility testing
	Nato Second- ary Imagery Format (NSIF), STANAG 4545 ed 1.:1998			NSIF establishes the format for ex- change of elec- tronic secondary imagery. Used in Profile: AMN
	BIIF (ISO 12087-5:1998)			
	NSILI (STANAG 4559 ed.3:2010)			NSILI provides interoperability between NATO nations recon- naissance data- bases and product libraries
				Used in Profile: AMN
	NIIRS (STANAG 7194 ed.1:2009)			NIIRS provides evaluation of im- agery quality and use of a consistent

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	STANDARDS	EMERGING NEAR TERM	FADING	Remarks
				measure for such evaluations
	NADS (STANAG 4575 ed.3:2009)			NADS defines an interface for advanced digital storage systems.
	GMTIF (STANAG 4607 ed.3:2010)			GMTIF defines a ground mov- ing target indicat- or format. Used in Profile: AMN
	DMIS (STANAG 4609 ed.3:2009)			 DMIS defines a digital motion imagery standard. For CCEB interoperability this standard is not applicable.
	NPIF (STANAG 7023 ed.4:2009)			Used in Profile: AMN NPIF establishes a standard data format and a standard transport architecture for the transfer of re- connaissance and surveillance im- agery and associ- ated auxiliary
	AR-TRI (STANAG 7024 ed.2:2001)			AR-TRI estab- lishes the physic- al format for the exchange of mag-

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
				netic tape cart- ridges
	Exchange of Im- agery (STANAG 3764 ed.6:2008)			
	Implementing JPEG 2000 in NITFS/BIIF/ NSIF (ISO 10918-4:1999)			This profile defines the lim- its of the inter- national standard that can be used within NITF 2.1.
	Link-11 (STANAG 5511 ed.7:2008, M- Series)			For further guid- ance refer to the Bi-SC Data Link Migration Strategy, Novem- ber 2000.
				For CCEB in- teroperability the standard is MIL- STD 6011C
	1	Link-16 (STANAG 5516 ed.5:2009 RD, J- Series)		For CCEB in- teroperability the mandatory stand- ard is MIL-STD 6016C Change 1 and the emerging standard is MIL- STD 6016D
				Used in Profile: AMN
	,	Link-22 (STANAG 5522 ed.3:2009 RD, J- Series)		Used in Profile: AMN
		Technical charac- teristics of the		

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	MANDATORY STANDARDS	EMERGING NEAR TERM	FADING	Remarks
		Link 22 TDL sys- tem (STANAG 4610 ed.1)		
			Link-14 (STANAG 5514 ed.2:2002)	The Link-14 is a legacy system that most NATO nations have no intention to im- plement in new platforms other than interfacing data link buf- fers and have ceased to use or maintain. There- fore considered fading
	PDF-Format 1.4 ed.1 (PDF/A-1, ISO 19005-1:2005)		Formets deleted in NCSP v.6	Portable docu- ment presentation format, realised in Adobe product versions 5 and 6. Used in Minerva system at NATO HQ
				For CCEB in- teroperability the primary standard is Adobe Post- script (level I and II) /Encapsulated Postscript (EPS) , and the secondary standard is Adobe PDF
				Used in Profile: AMN

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
	Rich Text Format (RTF) v.1.9.1:2007 (MS)			Basic docu- ment interchange format
	ASCII Text, ISO 646:1991			For constrained environments
	UTF-8 (IETF RFC 3629:2003)			Universal Text Format
	Document Object Model (DOM) Level 3:2004 (MS)			Basic Document Object Model .
	Office XP formats:2003 (MS)		Office 2000 formats: Office XP	fice200-formats Not to be used for new systems. Pertains to the in- terchange formats of MS Word, Ex- cel and Power- Point, irrespect- ive of the ac- tual MS Office version or gener- al office automa- tion package be- ing used.
	OpenDocument (ODF) ISO/IEC 26300:2006			Formerly pub- lished as OASIS standard.
		Office Open XML, ed.1 (ECMA-376)		Used in Profile: AMN
		Office Open XML, ISO/IEC 29500:2008	1	XML variant of Microsoft Office.

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
				Used in Profile: AMN
	HTML 4.01 (RFC 2854:2000)			Used in Profile: AMN
		Real Simple Syn- dication (RSS 2.0) (WS-I:2010)		Used in Profile: AMN
		GeoRSS (GeoRSS 1.0):2007 (OGC)		Used in Profile: AMN
	Atom Syndic- ation Format (IETF RFC 4287)			Used in Profile: AMN
	XHTML 1.0:2002 (W3C)	XForms 1.0:2003 (W3C)		XHTML is spe- cified in XML Used in Profile: AMN
	SGML (ISO 8879:1986)			For high value complex docu- ments
Storage Services				
Web Services				
	HTTP v. 1.1 (IETF RFC 2616:1999 up- dated by RFC 2817:2000), URL (RFC 4248:2005, 4266:2005), URI (RFC 3986:2005)			Used in Profiles: AMN, tactESB
		Content-ID and Message-ID URLs (IETF RFC 2392:1998)		
		HTTP State Change Mg-		Used in Profile: tactESB

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	STANDARDS	EMERGING NEAR TERM	FADING	Remarks
		mt. (IETF RFC 2965:2000)		
		AtomPub (IETF RFC 5023:2007)		
	HTTPS (IETF RFC 2818:2000)			
	HTTP Extensions for Web Dis- tributed Author- ing and Ver- sioning (Web- DAV) (IETF RFC 4918:2007)			
		Web Services Business Process Execution Lan- guage (WSBPEL) v.2:2007, OASIS		
		Web Services Federation (WSFED):2010, OASIS		Used in Profile: AMN
		Web Service Choreography In- terface (WSCI) v.1:2002		
		Business Pro- cess Model and Notation (BPMN) v.2.0:2010		
		Open Services In- frastructure (OpenSiS) v.1.9.5.6, Open- SIS		
		Java Enterprise Edition 1.4 Spe-		

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	EMERGING NEAR TERM	FADING	Remarks
	cification (JAVA EE v.6:2009), (JCP:2002)		
	Java Remote Method Invoc- ation (JRMI), (JCP)ed.1.5.0:200		
	Java API for XML Processing (JAXP) v.1.3, (JCP:2004)		
	Java Naming and Directory Inter- face (JNDI) ed. 1.2, (SUN:1999)		
	DSML v2.0:2002, OAS- IS		DSML provides a Dircetory Access via a Web inter- face
	Dublin Core Metadata Ele- ment Set (ISO 15836:2009)		Used in Profile: AMN
	Binding of Metadata to Data Objects (NC3A RD 2977)		Used in Profile: AMN
	NATO TIDE In- formation Dis- covery (Re- quest-Response), v.2.3:2009 (ACT)		Part of TIDE spe- cification at ACT. For CCEB in- teroperability this standard is not ap- plicable.
			Used in Profile: AMN
	NATO TIDE Service Dis-		Part of TIDE spe- cification at ACT.

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	STANDARDS	EMERGING NEAR TERM	FADING	Remarks
		covery (Sub- scribe-Publish), v.2.2.0:2008 (ACT)		For CCEB in- teroperability this standard is not ap- plicable.
	WSDL v1.1:2001, W3C			Used in Profiles: AMN, tactESB
	JNLP v6.0:2011, JCP			
	JAVA Serv- er Pages JSP v2.0:2003, JCP			
	JAVA Servlets v3.0:2009, JCP			
	XML 1.0 3rd ed:2004, W3C			Where semantic tags are required, the NC3 Repos- itory serves as an XML registry (see Data Man- agement). Used in Profile: tactESB
		XLink 1.0:2001, W3C		XLink is used to point to resources from XML docu- ments.
		XPointer 1.0:2001, W3C		XPointer is used to identify XML fragment inside any given XML documents.
		XQuery 1.0:2003, W3C		
		Relax NG (ISO/ IEC 19757-2:2008)		Relax NG may be a replacement for

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	MANDATORY STANDARDS	EMERGING NEAR TERM	FADING	Remarks
				XML schema lan- guages.
	XML Base:2001, W3C			
	XMI ed.1:2001 (ISO/IEC 19503:2005)			XMI can be used for any metadata whose metamodel can be expressed in Meta-Object Facility (MOF).
	XML In- foset:2001, W3C			
	XSL Associ- ation:1999, W3C			
	Namespaces in XML (xml- names-19990114: W3C	1999)		Used in Profiles: AMN, tactESB
	Extensible Stylesheet Lan- guage Transform- ation (XSLT) 1.0:1999			Used in Profile: AMN
	Extensible Stylesheet Lan- guage (XSL) 1.0:2001			
		Cascading Style Sheets (CSS) 2.1:2001		Used in Profile: AMN
	XML Schema, Part 1-2:2004			Used in Profiles: AMN, tactESB
	Wireless Markup Language (WML) 2.0:2001			WML to be used with Wireless Ap- plication Protocol (WAP) for con-

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	STANDARDS	EMERGING NEAR TERM	FADING	Remarks
				strained environ- ments
		Efficient XML Interchange Format (EXI) v1.0		Efficient imple- mentations of XML in the tac- tical environment
		XML Path Lan- guage (XPath) v2.0:2003, W3C		For CCEB in- teroperability this standard is man- datory.
	vice Basic Pro-	WS-I Web Ser- vice Basic Pro- file, v1.2:3rd ed. 2007		For CCEB in- teroperability this profile is mandat- ory.
				Used in Profiles: AMN (v1.1), tact- ESB (v1.1)
	SimpleObjectAccessProtocolv1.1(SOAP),W3C			Could be used in support of the Geo Web Ser- vices.
				Used in Profiles: AMN (v1.1), tact- ESB (v1.2)
		WS-I Simple SOAP Binding Profile v1.0:2004		For CCEB in- teroperability this profile is mandat- ory.
				Used in Profile: tactESB
		WS-I Attach- ments Profile v1.0:2nd ed. 2006		For CCEB in- teroperability this profile is mandat- ory.

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
		WS-I Reliable Messaging v1.2:2009		
		WS-Addressing v1.0:2010		
		WS-Notification v1.3:2006		
		Representational State Trans- fer (REST):2002, (ACM)		Used in Profile: AMN
Device Independ- ent Console				
	X Window Sys- tem 11 R7.5:2009		X Window Sys- tem 11 R5	The R6.6 release addresses a por- tion of the back- log of bug re- ports since Re- lease 6.5.1 patch 1, along with additional fixes from the Xfree86 community. R5 should not be used for future systems. For CCEB in- teroperability this
			Win 32 APIs	standard is not ap- plicable As part of MS
				Windows 2000 Interfaces
				For CCEB in- teroperability this

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
				standard is not ap- plicable
	CDE 2.1:1997		CDE 1.0	Common Desktop Envir- onment is the UNIX Windows Desktop equival- ent.
				For CCEB in- teroperability this standard is not ap- plicable
	Motif/CDE Style Guide Rev 2.1:1997		Motif Style Guide Rev 1.2	Toolkit specific style guides
				For CCEB in- teroperability this standard is not ap- plicable
			MS Windows In- terface Guidelines for Software Design	Toolkit specific style guides. As part of MS Win- dows 2000 Inter- faces.
				For CCEB in- teroperability this standard is not ap- plicable
	Motif 2.1:1997		Motif 1.2	For CCEB in- teroperability this standard is not ap- plicable
			Style Guide Ver-	For CCEB in- teroperability this standard is not ap- plicable

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	EMERGING NEAR TERM	FADING	Remarks
		•	For CCEB in- teroperability this standard is not ap- plicable
Content Mgmt	Semantics of Business Vocabu- lary and Business Rules, Vers. 1.0 (SBVR); OMG 2008		

3.4.3. List of Communications Standards

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	. –	EMERGING NEAR TERM	FADING	Remarks
Network and				
Transport Ser-				
vices				
	DNS (IETF STD			Bind version 9
	13:1987, RFC			or later should be
	1034:1987 and			used.
	RFC 1035:1987			
	updated by RFC			Used in Profile:
	1101:1989,			AMN
	1183:1990, up-			
	dated by			
	5395:2008;			
	1706:1994,			
	1876:1996,			
	1982:1996,			
	1995:1996,			
	1996:1996,			
	2136:1997,			
	2181:1997, up-			
	dated by 5452:2009;			

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	STANDARDS	EMERGING NEAR TERM	FADING	Remarks
	2308:1998, 2845:2000, 2931:2000, 3007:2000, 3226:2004, 3425:2002, 3597:2004, 3645:2003, 4033:2005, 4034:2005, 4034:2005, 4035:2005, 4343:2006, 4470:2006, 4592:2006)			
		mDNS (IETF Draft draft- cheshire- dn- sext-multicastdns-		Part of TIDE spe- cification at ACT. For CCEB in- teroperability this standard is not ap- plicable.
		IPSec Material in DNS (RFC 4025:2005)		
				NACOSA Oper- ating Instructions A-03-06 deals with the TCP/IP environment and A-03-07 deals with the OSI en- vironment. Both are due for re- write.
	Assigned Num- bers (RFC 3232:2002)			
	IPv4 (STD 5, RFC 791:1981, 792:1981,			Used in Profile: AMN

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	STANDAR		EMERGING NEAR TERM	FADING	Remarks
	894:1984, 919:1984, 922:1984, 950:1985 dated by 1112:1989, 2474:1998, 2507:1999, 2508:1999, 3168:2001, 3260:2002, 3376:2002, 4604:2006, 4884:2007)	up- RFC			
	IPv6 1981:1996, 2375:1998, 2460:1998, 2464:1998, 2467:1998, 2470:1998, 2491:1999, 2492:1999, 2492:1999, 2526:1999, 2529:1999, 2520:1999, 2590:1999, 2710:1999 dated 3590:2003, 2711:1999, 2894:2000, 3056:2001, 3111:2001, 3146:2001, 3146:2002, 3307:2002, 3483:2003, 3510:2003,	(RFC up- by			Note: Category of RFC 2375:1998 is 'Informal' Used in Profile: AMN

SERVICECAT-	MANDATORY	EMERGING	FADING	Remarks
EGORY / CAT-	STANDARDS	NEAR TERM		
EGORY / SUB-				
CATEGORY				
	3544:2003,			
	3587:2003,			
	3595:2003,			
	3697:2004,			
	3736:2004,			
	3810:2004,			
	3879:2004,			
	3956:2004,			
	4001:2005,			
	4007:2005,			
	4213:2005,			
	4291:2006,			
	4311:2005,			
	4338:2006,			
	4489:2006,			
	4443:2006,			
	4489:2006,			
	4604:2006,			
	4861:2007,			
	4862:2007,			
	4884:2007,			
	4941:2007,			
	5095:2007,			
	5494:2009)			
	IGMP v.3 (RFC			RFC 3367:2002
	3376:2002 up-			obsoleted
	dated by			2236:1997 up-
	4604:2006)			dates RFC
				1112:1989 and
				is widely im-
				plemented, RFC
				3376:2002 ob-
				soleted RFC
				2236:1997
	Host require-			
	ments (STD			
	3, IETF RFC			
	1122:1989 up-			
	dated by			

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
	2474:1998, 2181:1997, 3168:2001, 3260:2002, 4033:2005, 4034:2005, 4035:2005, 4343:2006, 4379:2006, 4470:2009, 5452:2009, 5462:2009)			
			tocol, BOOTP (RFC 951:1985	Will be overtaken by the richer DH- CP. BOOTP is still available in older implement- ations and is ex- pected to phase out.
	IP Encapsulation (RFC 2003:1996)		Clarifications and	
			Extensions for the Bootstrap Protocol (RFC 1542:1993)	
		DHCP for IPv6 (RFC 3315:2003 updated by 4361:2006, 5494:2009)	1	

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
		Dual Stack IPv6 mobility support (RFC 5555:2009)		
		IPv6 Prefix Op- tions for DHCPv6 (RFC 3633:2003)		
		DNS Configura- tion Options for DHCPv6 (RFC 3646:2003)		
		NIS-Options for DHCPv6 (RFC 3898:2004)		
	Dynamic Host Configuration Protocol, DHCP (RFC 2131:1997 updated by RFC 3396:2002, 4361:2006, 5494:2009)			
	Differentiated Services Field (IETF RFC 2474:1998 up- dated by 3168:2001, 3260:2002)			DiffServ re- defines use of former TOS field; first, but not sufficient RFC to differentiate traffic classes. RFC for DiffServ still missing. Ap- plicable to both IPv4 and IPv6
	Resource ReSer- Vation Protocol (RSVP) (IETF RFC 2205:1997)			
	Requirements for IPv4 routers			

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	MANDATORY STANDARDS	EMERGING NEAR TERM	FADING	Remarks
	(RFC 1812:1995 updated by 2644:1999)			
	-	OSPF for IPv6 (RFC 5340:2008)		Suitable for LANs as well as WANs (includ- ing tactical net- works) with suffi- cient bandwidth
	IS to IS in- tra-domain route- ing information exchange pro- tocol (ISO/IEC 10589:2002)			
		RIPng for IPv6 (RFC 2080:1997)		
	Border Gateway Protocol (BGP4) (RFC 4271:2006)			
		BGMP (RFC 3913:2004)		
	Application of BGP-4 (RFC 1772:1995)			

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
	Protocol Inde- pendent Mul- ticast Sparse Mode(PIM-SM) (RFC 4601:2006, updated by 5059:2008)			PIM-SM is im- plemented by the router market leaders.
		Protocol Inde- pendent Mul- ticasting Dense Mode(PIM-DM) (RFC 3973:2005)		PIM-DM is in- cluded as a second concept for tactical net- works
		Generic Rout- ing Encapsula- tion (GRE) (RFC 4023:2005, up- dated by 5332:2008)		GRE is included as a general rout- ing encapsulation mechanism
	Traditional IP Network Address Translator (RFC 3022:2001)			
		StatelessIP/ICMP TranslationAlgorithm(SIIT)(RFC 2765:2000)		
		Generic Packet Tunneling in IPv6 (RFC 2473:1998)		This RFC is a generic tun- nel mechanism, which can be ap- plied for several protocols.
	Router Internet Protocol (RIP v2) MIB extension (RFC 1724:1994)			To be used in stat- ic networks. See also System Man- agement.
	Classless Inter Domain Rout-			CIDR is only val- id for IPv4

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	MANDATORY STANDARDS	EMERGING NEAR TERM	FADING	Remarks
	ing (CIDR) (RFC 4632:2006)			
		Mobile IPv6 (RFC 3775:2004)		
		Mobile IPv6 Fast Handovers (RFC 5568:2009)		
		IPSec and Mo- bile IPv6 (RFC 3776:2004 up- dated by 4877:2007)		
		Policy-based Net- work Manage- ment - General (RFC 1104:1989, 2753:2000, 3198:2001, 3334:2002)		
		Policy-based Net- work Manage- ment - DiffServ (RFC 2963:2000, 2998:2000, 3086:2001, 3260:2002, 3287:2002, 3289:2002, 3290:2002, 3308:2002, 3496:2003)		
		Policy-based Net- work Manage- ment - IntServ (RFC 2205:1997 updated by		

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	MANDATORY STANDARDS	EMERGING NEAR TERM	FADING	Remarks
		2750:2000,		
		3936:2004,		
		4495:2006, 2206		
		- 2210:1997,		
		2380:1998,		
		2382:1998,		
		2430:1998,		
		2490:1999, 2745		
		- 2746:2000,		
		2747:2000 up-		
		dated by		
		3097:2001,		
		2749:2000,		
		2750:2000,		
		2755:2000,		
		2814:2000,		
		2872:2000,		
		2961:2001, up-		
		dated by		
		5063:2007;		
		2996:2000,		
		3097:2001,		
		3175:2001, up-		
		dated by		
		5350:2008;		
		3181:2001,		
		3182:2001,		
		3209:2001 up-		
		dated by 3936:2004,		
		4874:2007;		
		3210:2001,		
		3468:2003,		
		3473:2003 up- dated by		
		4003:2005;		
		3474:2003,		
		3476:2003,		
		3477:2003		
		4201:2005,		

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	MANDATORY STANDARDS	EMERGING NEAR TERM	FADING	Remarks
		4783:2006, 4873:2007, 4874:2007, 5250:2008, 5420:2009		
	Point to Point Protocol (PPP) Internet Protocol Control Protocol (IPCP) (RFC 1332:1992 up- dated by 3241:2002, 4815:2007)			To allow pack- et switched ser- vices over cir- cuit switched in- terconnections.
	Layer 2 Tun- neling Protocol (L2TP) (RFC 3308:2002)			
	Link Control Pro- tocol (LCP) ex- tensions (RFC 1570:1994 up- dated by 2484:1999)			Addition to LLC1 (see Link Layer).
	Protocol (PPP)			
	PPP Challenge Handshake Au- thentication Pro- tocol (CHAP) (RFC 1994:1996			Used in routers

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
	updated by 2484:1999)			
	PPP Multilink (MP) (RFC 1990:1996)			Allows for ag- gregation of bandwidth via multiple simul- taneous data link connections
	Virtual Router Redundancy Pro- tocol (VRRP), IETF RFC 3768:2004			
	Winsock 2 (Revi- sion 2.2)			
			Transport Service (ISO 8072:1996)de- leted in NCSP v.6	
	TCP (IETF STD 7:1981, RFC 793:1981 up- dated by RFC 1122:1989, 3168:2001)			Used in Profiles: AMN, tactESB
	UDP (IETF STD 6:1980, RFC 0768:1980)			Used in Profile: tactESB
	OSI transport svc over TCP/IP (RFC 2126:1997)			Includes the ISO Transport Pro- tocol
	Space commu- nications pro- tocol specifica- tion (SCPS) - Transport pro- tocol (SCPS-TP)			

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	STANDARDS	EMERGING NEAR TERM	FADING	Remarks
	(ISO 15893:2010)			
Mixed DISA standards				
Data Link and Connection Ser- vice				
External Net- works				
			X.25 (1996, Cor.1:1998)	
	MPLS (IETF RFC 3031: 2001, 3032:2001)			
	Tactical Commu- nications, STANAGs 4637ed1:2009, STANAG 4638ed1:2009, 4639ed1:2009, 4640ed1:2009, 4643ed1:2009, 4644ed1:2009, 4646ed1:2009, 4647ed1:2009			For CCEB in- teroperability this standard is not ap- plicable
	ISDN: ITU-T G, I Series			ISDN Telephony
		UMTS (3GPP)		
		GPRS (3GPP)	ITU-T E, P, Q, V Series	
	Digital Video Broadcasting (DVB) (ET- SI:2009)			

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
			ITU-T V.90:1998	
			ITU-T V.42:2002 Corrigendum 1:2003	
			User Network In- terface - UNI v4.0 (af-sig-0061.000)	
			Private Net- work - Net- work Interface - PNNI v1 (af- pnni-0055.000)	
			over ATM -	For CCEB in- teroperability this standard is not ap- plicable.
	Data Forwarding between Tactic- al Data Sys- tems employ- ing Link-11/11B and Link-16	Standards for Data Forwarding between Tactic- al Data Sys- tems employ- ing Link-11/11B and Link-16 (STANAG 5616 ed.5:2009)		Gateway between Link-11 and Link-16. For CCEB in- teroperability the mandatory stand- ard is MIL-STD 6020
	Link 11 STANAG 5511 ed.7:2008			Communications part for Link-11 For CCEB in- teroperability the standard is MIL- STD 6011C Used in Profile: AMN

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
	STANAG 4175 ed.4:2009	STANAG 4175 ed.5:2010		Communications part for Link-16 Used in Profile: AMN
	ed.2:2004 (IDL	STANAG 7085 ed.3:2009 (IDL for Imaging Sys- tems)		STANAG 7085 provides the inter- operability stand- ards for 3 classes of im- agery DL used for primary imagery data transmission.
	STANAG 4586 ed.2:2007	STANAG 4586 ed.3:2008		STANAG 4586 facilitates com- munication between a UCS and different UAVs and their payloads as well as multiple C4I users.
Tactical Area Comms				
		Maritime Tactic- al Wide Area Net- working (ACP 200)		For CCEB in- teroperability the mandatory stand- ard is ACP 200 :Maritime Tactic- al Wide Area Net- working
	Routing and Dir- ectory for tac- tical Systems, STANAG 4214 ed.2:2005			
		Gateway Mul- tichannel Cable		

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
		Link (Optical), STANAG 4290 ed.1 (RD)		
	Enhanced Digital Strategic Tactic- al Gateway (ED- STG) (STANAG 4578 ed. 2:2009)		replaced by the more fundament- al STANAG 4206. STANAG 4206 not to be	
	NATO Multi- channel tactical digital Gateway (STANAG 4206: Ed.3:1999)			The overlapping area between STANAG 4206 and STANAG 4578 has to be re- solved by CaP/1 CIS. For CCEB in- teroperability this standard is not ap- plicable
	itary Commu- nications Dir- ectory System,	The NATO Mil- itary Commu- nications Dir- ectory System, STANAG 5046 ed.4:2010		
		Interconnection of IPv4 Networks at Mission Secret and Unclassified Security Levels, STANAG 5067 ed.1:2007 (RD)		
LAN Comms				

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	STANDARDS	EMERGING NEAR TERM	FADING	Remarks
	Media Access Control (MAC) Bridges (IEEE 802.1D:2004)			
	Virtual Bridged Local Area Net- works (VLAN) (IEEE 802.1q:2005)			
	Link Layer Dis- covery Pro- tocol (IEEE 802.1AB:2009)			
Transmission				
1	FDDI, ISO 9314:1989	1		For CCEB in- teroperability this standard is not ap- plicable.
		STANAG 4444 ed.2:2010 RD (Slow hop EC- CM)		HF standard for Link-22. For CCEB in- teroperability this STANAG is man- datory
	JREAP, MIL- STD 3011			
	ISO/IEC 8802-3:2000 (CSMA/CD)			
				For CCEB in- teroperability the mandatory stand- ard is Interoper- ability and Per- formance Stand- ard for SAT-

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	EMERGING NEAR TERM	FADING	Remarks
			COM (MIL-STD 188-164).
			For CCEB in- teroperability the mandatory stand- ard is MIL- STD-188-181B.
			For CCEB in- teroperability the mandatory stand- ard is Interop- erability Standard for 5-Khz UHF DAMA Terminal Waveform MIL- STD-188-182A.
			For CCEB in- teroperability the mandatory stand- ard is DoD Inter- face Standard, In- teroperability of UHF MILSAT- COM DAMA Control System MIL- STD-188-185.
			For CCEB in- teroperability the mandatory stand- ard is Interoper- ability and Per- formance Stand- ards for C-Band, X-Band, and Ku- Band SHF Satel- lite Commu- nications Earth Terminals, 13

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	MANDATORY STANDARDS	EMERGING NEAR TERM	FADING	Remarks
				Jan 1995 MIL- STD-188-164.
				For CCEB in- teroperability the mandatory stand- ard is Interoper- ability and Per- formance Stand- ards for SHF Satellite Com- munications PSK Modems (Fre- quency Division Multiple Access (FDMA) Opera- tions), 13 Janu- ary 1995, with Notice of Change 1, 9 Septem- ber 1998, MIL- STD-188-165.
	ACP 190 (B)			
	ACP 190 (B) NATO Suppl 1A			Spectrum Sup- portability Re- quest/Comment is a two-way com- mitment between the (host)nation owing the system and each nation hosting the sys- tem: - it is a prerequis-
				ite for the procur- ing nation/agency to perate SDEs in a host nation.

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
				 host nations granting support to a SDE is expec- ted to assign fre- quencies when re- quested. Failure to follow this process will have very negat- ive long-term im- pacts: an ever grow- ing risk of inter- ference between own systems. the ever-in- creasing pressure
				from the commer- cial sector: hav- ing an accurate view of military use of spectrum is an essential pre- condition to be able to defend it against civil en- croachment.
				teroperability this standard is not ap- plicable.
	ACP 190 (B) NATO Suppl 2			For CCEB in- teroperability this standard is not ap- plicable

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	MANDATORY STANDARDS	EMERGING NEAR TERM	FADING	Remarks
	SMADEF XML Rel.1.2.2	SMADEF XML Rel.1.2.3		For CCEB inter- operability Rel.1.2.3 is man- datory
				For CCEB in- teroperability the mandatory stand- ard is Equip- ment Technic- al Design Stand- ards for Common Long Haul/Tac- tical Radio Com- munications in the LF Band and Lower Frequency Bands MIL STD 188-140A
				For CCEB in- teroperability the mandatory stand- ard is Di- gital Line-of- Sight (LOS) Mi- crowave Radio Equipment, 7 May 1987 MIL STD 188-145
		MIDS terminals STANAG 4175 ed. 5:2010		
			Single serial line interface (TIA-232- E:1991)	
			Multi-point seri- al line (TIA-422- B:2005)	

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	STANDARDS	EMERGING NEAR TERM	FADING	Remarks
	Serial binary data exchange at DTE and DCE (TIA-530-A)			
	Generic specific- ation for optical wave-guide fibers (EIA 4920000: 1997)			
VLF	VLF and LF Broadcast OOK Systems, STANAG 5030ed.4:1995			
HF	Conditions for in- teroperability of 2400 BPS / HF (STANAG 4197 ed.1:1984)			(QSTAG 1108)
	Technical stand- ards for single channel HF ra- dio equipment, STANAG 4203 ed.3:2007			For CCEB in- teroperability the mandatory stand- ard is MIL STD 188-141A
	Characteristics of 1200/2400/ 3600 bps single tone modulators/de- modulators for HF Radio links (STANAG 4285 ed.1:1989)			For CCEB in- teroperability the mandatory stand- ard is MIL- STD-188-110A
	Non-Hopping Serial TONE HF			

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY	STANDARDS	EMERGING NEAR TERM	FADING	Remarks
	Radio, STANAG 4415 ed.1:1999			
	4413 cu.1.1777	HF Radios STANAG 4444 ed.2:2010		
	Minimum Stand- ards for Nav- al Shore-to-Ship Broadcast Sys- tems, STANAG 4481 ed.1			
	Automatic Radio Control System for HF Links STANAG 4538 ed.1:2009			
	Non-hopping HF Communications Waveforms STANAG 4539 ed.1:2006			
	Profile for HF ra- dio data commu- nications (STANAG 5066 ed.2:2008)			
VHF				
	Technical stand- ards for single channel VHF ra- dio equipment STANAG 4204 ed.3:2008			For CCEB in- teroperability the mandatory stand- ard is MIL STD 188-242
	Communication between Single Channel and Fre- quency Hopping Radios in VHF,			

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
	STANAG 4292 ed.2:1987			
	Non-secure Voice Interoperability for VHF Radios, STANAG 4448 ed.1:2006			
	Secure Voice and Data Interface for VHF Radios, STANAG 4449 ed.1:2006			
UHF	Technical stand- ards for single channel UHF ra- dio equipment STANAG 4205 ed.3:2005			For CCEB in- teroperability the mandatory stand- ard is MIL STD 188-243
	Have Quick STANAG 4246 ed.3:2009			For CCEB in- teroperability this standard is not ap- plicable
	STANAG 4372 ed.3:2008 (Sat- urn)			UHF standard for Link-22, but can also carry Link-11 and Link-16 mes- sages.
UHF SATCOM				
	Interoperability Standard for 25 kHz UHF/ TDMA/DAMA terminal Wave-			STANAG 4231 ed.5 is identical with MILSTD-188-183
	form STANAG 4231 ed.5:2011			For CCEB in- teroperability the mandatory stand-

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		EMERGING NEAR TERM	FADING	Remarks
				ard is MIL- STD-188-183D
				For CCEB in- teroperability the mandatory stand- ard is Interoper- ability and Per- formance Stand- ard for the Data Control Waveform MIL- STD-188-184
SHF SATCOM				
	Super High Fre- quency (SHF) Military Satel- lite (MILSAT- COM) jam-res- istant modem (STANAG 4376 ed.1:1998)			For CCEB in- teroperability this standard is not ap- plicable
	High Frequency (SHF) Military Satellite COM- munications (MILSATCOM) interoperability standards	Overall Super High Frequency (SHF) Military Satellite COM- munications (MILSATCOM) interoperability standards (STANAG 4484 ed.3:2010)		For CCEB in- teroperability this standard is not ap- plicable
	modem for ser- vices conforming	COM Non-EPM modem for ser- vices conforming to class-A of		For CCEB in- teroperability this standard is not ap- plicable

SERVICECAT- EGORY / CAT- EGORY / SUB- CATEGORY		NEAR TERM	FADING	Remarks
	(STANAG 4485 ed.1:2002)	(STANAG 4485 ed.2:2010)		
	quency (SHF) Military Satel- lite COMmunic- ations (MILSAT- COM) Frequency Division Multiple Access (FDMA) Non-EPM mo- dem for ser- vices conforming to class-B of STANAG 4484	Military Satel- lite COMmunic- ations (MILSAT- COM) Frequency Division Multiple Access (FDMA)		For CCEB in- teroperability this standard is not ap- plicable
	quency (SHF) Medium Data Rate (MDR) Military Satel- lite COMmunic- ations (MILSAT- COM) jam-resist- ant modem inter-	Medium Data Rate (MDR) Military Satel- lite COMmunic- ations (MILSAT- COM) jam-resist- ant modem inter- operability stand-		For CCEB in- teroperability this standard is not ap- plicable
		Interoperability standard for Satellite Broad- cast Services (SBS) (Draft) (STANAG 4622 ed.1 RD2)		For CCEB in- teroperability this standard is not ap- plicable
EHF SATCOM	Digital interop- erability between			For CCEB in- teroperability the

SERVICECAT-	MANDATORY	EMERGING	FADING	Remarks
EGORY / CAT-	STANDARDS	NEAR TERM		
EGORY / SUB-				
CATEGORY				
	EHF Tactical Satellite Commu- nications Termin- als (STANAG 4233 ed.1:1998)			mandatory stand- ard is MIL- STD-1582D
	EHF MIL SAT- COM interop- erability stand- ards for medium data rate services STANAG 4522 ed.1:2006			For CCEB in- teroperability the mandatory stand- ard is MIL- STD-188-136
QoS				
			DoD Guide to selecting compu- terbased multi- media stand- ards, technolo- gies, products and practices deleted in NCSP v.6	

3.5. INFORMATION ASSURANCE

3.5.1. List of Standards

SUBAREA / SERVICE CATEGORY	CAT- EGORY SUBCAT- EGORY	MANDAT- ORY STAND- ARDS	EMERGING NEAR TERM	FADING	Remarks
			Community Security Re- quirements Statement ab- stract, v1.1 (NATO:2010)		Used in profile: AMN
		Common Cri- teria (ISO/IEC			Procedural doc- ument dealing with the evalu-

SUBAREA / SERVICE CATEGORY	CAT- EGORY / SUBCAT- EGORY	MANDAT- ORY STAND- ARDS	EMERGING NEAR TERM	FADING	Remarks
		15408-1:2009, -2 to-3:2008)			ation criteria for IT security.
					Guidance on the use of Com- mon Criteria within NATO is provided with AC/322- D(2010)0043.
		Physical char- acteristics (ISO/IEC 7810:2003)			
		Integrated circuit(s) with electrical con- tacts (ISO/IEC 7816:2006)			Base profile, consisting of parts 1-5)
		Interface between the card aware ap- plications and cards, PC/ SC Specs. v.2.0.1.9:2005			
		Card- resistance al- lications, JA- VACARDkit v.2.2.2:2006			
		Contactless cards (ISO/ IEC 14443:2008)			Base profile, consisting of parts 1 - 3.
SMI Service					
		Web-Services Security Pro-			Used in Profile: AMN

SUBAREA / SERVICE CATEGORY	CAT- EGORY SUBCAT- EGORY	MANDAT- / ORY STAND- ARDS	EMERGING NEAR TERM	Remarks
		file (WSS), v1.0 (OASIS)		
			WS Secur- ity Policy, v1.3:2009 (OASIS)	
		Security As- sertion Markup Lan- guage, SAML v2.0 (OASIS)		For CCEB in- teroperability the Secur- ity Ascertion Markup Lan- guage (SAML) v1.1 is mandat- ory and SAML 2.0 is emerging
		XKMS 2.0 (W3C):2005		Used in Pro- files: AMN, tactESB
				See Gener- al Security Key Manage- ment and Distri- bution.
				For CCEB in- teroperability the mandat- ory standard is ACP145(A) (Messaging Services Between Na- tions) and X.500 (based on CMI authen-
				tication frame- work)
Confidentiality				

SUBAREA / SERVICE CATEGORY	CAT- EGORY SUBCAT- EGORY	MANDAT- / ORY STAND- ARDS	EMERGING NEAR TERM	FADING	Remarks
		S/MIME with Encrypted Se- curity Ser- vice (ESS) (IETF RFCs 3850:2004, 3851:2004)		ACP120 replaced by ACP145	Messaging Sys- tem independ- ent encapsula- tion syntax sup- porting signa- ture and confid- entiality func- tions based on DSA. For CCEB in- teroperability the standard is S/MIME Ver- sion 3 ESS, ap- plication layer data confiden- tiality or link
			ITU-T X.411:1999		level encryption
			SCIP Sig- nalling Plan, SCIP-210 rev.3.3:2010 (IICWG)		For CCEB in- teroperability the SCIP stand- ard is mandat- ory
			Minimum Re- quuirements for SCIP, SCIP-214 rev.1.1:2010 (IICWG)		For CCEB in- teroperability the SCIP stand- ard is mandat- ory
			Cryptography Specification for SCIP, SCIP-231 rev.1.3:2008 (IICWG)		For CCEB in- teroperability the SCIP stand- ard is mandat- ory

SUBAREA / SERVICE CATEGORY	CAT- EGORY SUBCAT- EGORY	MANDAT- / ORY STAND- ARDS	EMERGING NEAR TERM	Remarks
			XML Confid- entiality La- bel Syntax 1.0 (NATO RTG-031)	Used in Pro- files: AMN
			SOAP Mes- sage Secur- ity 1.1:2004 (OASIS)	
			Username Token Pro- file, v1.1:2004 (OASIS)	
			X.509 Certific- ate Token Pro- file, v1.1:2004 (OASIS)	
			NATO PKI (NPKI) Certi- ficate Policy, rev.2 (NATO:2008)	Used in Profile: AMN
			Kerberos Token Pro- file 1.1:2006 (OASIS)	
		SAML Token Profile 1.1:2006 (OASIS)		
			SOAP Mes- sages with At- tachments (SwA) Pro- file 1.1:2006 (OASIS)	

SUBAREA / SERVICE CATEGORY	/ CAT- EGORY / SUBCAT- EGORY	MANDAT- ORY STAND- ARDS	EMERGING NEAR TERM	FADING	Remarks
		WS-Security Utility 1.0:2001 (OASIS)			
			WS-Trust 1.4:2007 (OASIS)		
Encryption		TLS v1.2 (IETF RFC		cluded in	Used as a trans port layer secur
		5246:2008)		NCSP v.6	ity protocol. Used in Pro files: AMN (v1.1), tactESB
			XML Encryp- tion (W3C):2008		Used in Profile tactESB
		vanced En- cryption Standard 128 (AES 128,	Key Wrap Advanced Encryption Standard 256 (AES 256, NIST FIPS 197)		 PKI components and applications should utilise AES for key wrap functions. AES 256 should be utilized pose 2008 for Roo CA and Sub CA PKI components together with SHA-384 and 512. End
					entities can stil utilize AES 128 together with SHA-256.

SUBAREA / SERVICE CATEGORY	CAT- EGORY SUBCAT- EGORY	MANDAT- ORY STAND- ARDS	EMERGING NEAR TERM	FADING	Remarks
					For CCEB in- teroperability AES 128 is emerging.
Integrity		IP ESP (RFC 4303:2005)			Encapsulating Security Pay- load (ESP) may support integ- rity and authen- tication depend- ing on the use of algorithms
		nature Al- gorithm 1024 (DSA-1024, NIST FIPS 186-2 with		Signature Algorithm (original version) not for new	Authentication and integrity algorithm for End Entities as mandated by the interoper- ability protocol PCT for imple- menting digit- al signatures for a NATO Public Key Infrastruc- ture (PKI) in the NATO mes- saging system. ECDSA 384 is planned for post 2008. Guid- ance is provided in AC/322- D(2004)0035. For CCEB in- teroperability the Digital Signature Al-

SUBAREA / SERVICE CATEGORY	CAT- EGORY / SUBCAT- EGORY	MANDAT- ORY STAND- ARDS	EMERGING NEAR TERM	Remarks
				gorithm (DSA) NIST FIPS 186-2 is man- datory. DSA FIPS 186-2 can be used in NATO for veri- fication pur- poses only.
		(PKCS#1 v2.1 RSA Crypto- graphy Stand-	Elliptic Curve Digital Signa- ture Algorithm (ECDSA 384, NIST FIPS 186-2 with Change Notice 1, Oct 2001)	Authentication and integrity al- gorithm for Sub CA and oth- er PKI com- ponents (such as Key Re- covery Agents) as mandated by the interoper- ability protocol PCT for imple- menting digit- al signatures for a NATO Public Key Infrastruc- ture (PKI) in the NATO mes- saging system ECDSA 384 is planned for post 2008. Guid- ance is provided in AC/322- D(2004)0035. For CCEB in- teroperability the Digital Signature Al- gorithm (DSA)

SUBAREA / SERVICE CATEGORY	CAT- EGORY / SUBCAT- EGORY	MANDAT- ORY STAND- ARDS	EMERGING NEAR TERM	FADING	Remarks
					NIST FIPS 186-2 is man- datory.
		Algorithm 256 (SHA-256, NIST FIPS 180-2 with	Algorithm 384 (SHA-384, NIST FIPS	gorithm (SHA-1), NIST FIPS 180-1 re-	pany the DSA and RSA for
Authentication					
		Radius, IETF RFC 2865:2006 up- dated by RFC 2868:2000, 3575:2003, 5080:2007	IPv6, IETF RFC		
			Kerberos v.5, IETF RFC 1510:1993		Used in Profile: AMN
			The Kerberos v5 Simple Au- thentication		

SUBAREA / SERVICE CATEGORY	CAT- EGORY SUBCAT- EGORY	MANDAT- / ORY STAND- ARDS	EMERGING NEAR TERM	Remarks
			and Secur- ity Layer (SASL) Mech- anism, IETF RFC 4752:2006	
			Single sign on (SSO, the Open Group)	
		Public-key and attribute cer- tificate frame- works, X.509 v3:2005 (ITU- T)		Used in Pro- files: AMN, tactESB
			X.509 Pub- lic Key Infra- structure Cer- tificate and CRL Profile (IETF RFC 5280:2008)	
		Identification of Issuers (ISO 7812:2007)		Base profile consisting of parts 1 - 2.
		XML Signa- ture (W3C):2008		
		XACML v2.0:2008 (OASIS)	XACML v3.0:2010 (OASIS)	Used in Pro- files: AMN, tactESB
			DOD EBTS 1.2 (DoD: 2000)	Used in Profile: AMN
			DOD EBTS 2.0 (DoD: 2000) (DoD:	Used in Profile: AMN

SUBAREA / SERVICE CATEGORY	CAT- EGORY SUBCAT- EGORY	MANDAT- / ORY STAND- ARDS	EMERGING NEAR TERM	FADING	Remarks
			Data Format for the Inter- change of Fin- gerprint, Fa- cial, and Scar Mark and Tat- too (SMT) In- formation (ANSI: 2008)		Used in Profile: AMN
			Biometric data interchange formats Part 2 (ISO 19794-2:2007)		Used in Profile: AMN
			Biometric data interchange formats Part 5: Face Im- age Data 8ISO 19794-5)		Used in Profile: AMN
			Biometric data interchange formats Part 6: Iris Im- age Data (ISO 19794-6)		Used in Profile: AMN
Detection					
Transsec					

3.6. SERVICE MANAGEMENT AND CONTROL

SERVICE	 MANDAT- ORY STAND- ARDS	EMERGING NEAR TERM	Remarks
Mgmt Info Pub- lisher			

SUBAREA / SERVICE CATEGORY	CAT- EGORY / SUBCAT- EGORY	MANDAT- ORY STAND- ARDS	EMERGING NEAR TERM	FADING	Remarks
Mgmt Info Sub- scriber					
Mgmt Info Col- lector					
Mgmt Info Pro- vider					
Asset Mgmt					
User Mgmt					
System Mgmt					
			WS- Management v1.0 (DMTF)		
		SNMPv3 Applications (IETF RFC 3413:2002)		SNMPv1 (IETF Std 15) not for new sys- tems	
		Message Pro- cessing and Dispatching for the SN- MP (RFC 3412:2002 up- dated by 5590:2009)			For CCEB in- teroperability this standard is not applicable

SUBAREA / SERVICE CATEGORY	CAT- EGORY SUBCAT- EGORY	MANDAT- / ORY STAND- ARDS	EMERGING NEAR TERM	FADING	Remarks
		User-based Se- curity Model (USM) for SN- MPv3 (RFC 3414:2002 up- dated by 5590:2009)			For CCEB in- teroperability this standard is not applicable
		View-based Access Con- trol Mod- el (VACM) for the SN- MP (RFC 3415:2002)			For CCEB in- teroperability this standard is not applicable
		Structure of Mgt Info (IETF Std 16:1990, IETF RFC 1155:1990 and 1212:1991)			For CCEB in- teroperability this standard is not applicable
		Architecture for SNMP Mgt Frame- works (RFC 3411:2002 up- dated by 5343:2008, 5590:2009)			For CCEB in- teroperability this standard is not applicable
		MIB II (IETF Std 17:1991, RFC 1213:1991 up- dated by 4293:2006, 4022:2005, 4113:2005)			For CCEB in- teroperability this standard is not applicable

SUBAREA / SERVICE CATEGORY	CAT- EGORY SUBCAT- EGORY	MANDAT- / ORY STAND- ARDS	EMERGING NEAR TERM	FADING	Remarks
			IPv6 MIB (IETF RFC 4293:2006)		For CCEB in- teroperability this standard is not applicable
			ICMPv6 MIB (IETF RFC 4293:2006)		For CCEB in- teroperability this standard is not applicable
			Multicast Group Mem- bership Dis- covery MIB (IETF RFC 5519:2009)		For CCEB in- teroperability this standard is not applicable
			IPv6 MIB for TCP (IETF RFC 4022:2005)		For CCEB in- teroperability this standard is not applicable
			IPv6 MIB for UDP (IETF RFC 4113:2005)		For CCEB in- teroperability this standard is not applicable
		Host Re- sources MIB (IETF RFC 2790:2000)			For CCEB in- teroperability this standard is not applicable
		Defs of Mgt Objects for the Ether- net-like In- terface types (IETF RFC 2666:1999, 3635:2003, 3638:2003)			For CCEB in- teroperability this standard is not applicable
		RMONMIBv.1(RFC2819:2000)	RMON2MIB(RFC4502:2006)		For CCEB in- teroperability

SUBAREA / SERVICE CATEGORY	CAT- EGORY / SUBCAT- EGORY	MANDAT- ORY STAND- ARDS	EMERGING NEAR TERM	FADING	Remarks
					this standard is not applicable
		OSPF MIB v.2 (RFC 4750:1996)			For CCEB in- teroperability this standard is not applicable
		RIP-2 MIB (RFC 1724:1994)			For CCEB in- teroperability this standard is not applicable
			formation		In addition same stand- ards as within LAN Manage- ment for SN- MP can be used Quad C used for man- agement of co- alition WANs For CCEB in- teroperability this standard is not applicable
				CMIP (ISO/IEC 9596-1:199 deleted in NISP v.1	Primarily used for Telecom Management
				CMIP PICS (ISO/ IEC 9596-2:199 deleted in NISP v.1	´
				GDMO (ISO/IEC	

SUBAREA / SERVICE CATEGORY	CAT- EGORY / SUBCAT- EGORY	MANDAT- ORY STAND- ARDS	EMERGING NEAR TERM		Remarks
				10165-4:19 deleted in NISP v.1	96)

This page is intentionally left blank

<u>4. PROFILES</u>

4.1. INTRODUCTION

025. The purpose of this chapter is to specify the NISP near term profiles. The document organises these profiles under the following considerations:

- Profiles derived from NATO Reference Architectures
- Profiles derived from NATO Operations
- Profiles derived from NATO member nations

026. The above list will be enhanced dynamically, based on updated profile defintions being developed in relevant NATO bodies.

027. The standards being used in these profiles may differ in version from those being liested in chapter 3. This is based on the time for the development of these standards and may be modified in newer versions of these profiles.

028. Standards, which are listed in NISP Vol. 2 and are belonging to one or more profiles, as listed in chap. 4 of this document or in NISP Vol. 4, are marked in the Remarks column as follows:

029. Used in Profile(s): standard1 (, standard2, ...)

030. Standards, which are not included by a valid RFCP in NISP, Vol.2, but are only included in a profile, are marked in the Remarks column in *italics* as follows:

031. Used in Profile(s):standard1 (, standard2, ...)

4.1.1. Profiles derived from NATO Operations

032. This chapter contains profiles from current or future planned NATO operations. Currently, the following operations are recognised:

• Afghan Mission Network (AMN)

4.1.2. Profiles derived from NATO member nations

033. This chapter contains profiles from member nations being proposed for interoperability purposes in NATO and between NATO nations.

4.2. PROFILE SPECIFICATIONS

034. This section summarizes the profiles, listed in volume 4:

4.2.1. NRF Generic Interface Profile

035. The purpose of this profile is to support NRF rotation specific profile development.

4.2.2. Tactical ESB - Profile

036. The aim of this specification is to describe a profile for a tactical Enterprise Service Bus (tact ESB) to be used in a coalition, highly mobile and distributed environment. The profile focuses specifically on requirements from military usage and goes beyond the ESB specification, available in civil implementations/products.

037. The profile is a generic specification; following the principle construction elements, it allows for national implementations a derivation from the proposed one, not losing the interoperability aspects.

038. Details of this profile are contained in: IT-AmtBw_A5_RuDi-High_Level_Concept_400.pdf (DEU)

4.2.3. AMN - Profile

039. The purpose of this specification is to define an Interoperability Standards Profile to support the Afghanistan Mission Network (AMN) and transition from today's legacy systems to NNEC by defining a basic level of system interoperability in order to enhance the exchange of information within and across the AMN. To support the goal of widespread interoperability the AMN Interoperability Profile defines a minimum profile of services and standards for Technical Interfaces, Data Interchange Standards and Application Profile Standards that are sufficient to provide a useful level of interoperability.

A. TECHNOLOGIES

040. This annex describes the technologies that are projected to be available today or in the near term period which will enable the transformation towards the NII.

A.1. DATA STRATEGY

A.1.1. Data Strategy

041. Reference: NNEC DATA STRATEGY - AC/322(SC/1)N(2008)0034(INV) 18 DEC 2008

A.1.2. Data Management

042. Data management will apply an integrated, federated, and scalable data framework to link disparate information sources and provide robust knowledge manage- ment to permit conclusions based on contextual relationships.

A.1.3. JC3IEDM

043. The JC3IEDM is a merger of both the C2IEDM (C2 IEDM, developed by the Multitlateral Interoperability Programme (MIP)) and the Reference Data Model of the NATO Corporate Data Model, which was developed by a predecessor of the DMSWG. The JC3IEDM is published under cover of STANAG 5525.

044. The Data Management Authority in NATO publishes the JC3IEDM and Directive and Guidance documents for Data Management in NATO. It will also register and manage both the Standard Data Elements and the Information Exchange Requirements (IER) used in the development process of data assets.

045. The main tool for Data Management in an NCW-environment is the NATO Metadata Registry and Repository. A version of the NMRR is currently posted under the DoD XML Registry.

A.1.4. NATO Discovery Metadata Specification (NDMS)

046. The NATO Discovery Metadata Specification defines discovery metadata elements for resources posted to NATO shared spaces. "Discovery" is the ability to locate data assets through a consistent and flexible search method. The NDMS specifies a set of information fields that are to be used to describe any data or service asset that is made known to NATO. It serves as a reference for developers, system architects, and engineers by identifying a minimum set of metadata elements in support of Discovery Services. Whilst discovery of data assets is the primary use of the NDMS it is also important to note that widespread use of the metadata elements will also improve documents record management in general. The NDMS will be employed consistently throughout the organization but it is not intended or necessary for it to displace other specifications that offer different semantics. 047. To support data asset discovery, NATO has developed the NDMS as the common set of descriptive metadata elements that are to be associated with each data asset that is made visible to the enterprise discovery capability. Metadata is often defined as being "data that describes and defines other data". Data assets available in the enterprise must be described with metadata, using the elements defined in this document to permit discovery through the enterprise discovery capability. The NDMS defines a minimum set of elements that must be used to describe data assets made visible to the enterprise. Users and system agents acting on their behalf that search the enterprise will discover data assets that have been tagged and entered into catalogues or repositories that respond to search queries specified in terms of NDMS entries as depicted in the NDMS Usage Conceptual Diagram in Figure A.1.

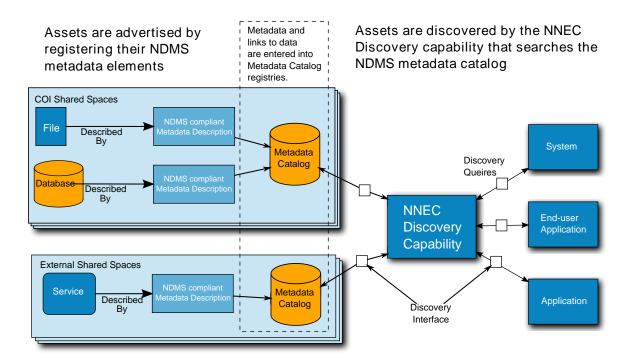


Figure A.1. NDMS Usage Conceptual Diagram

048. The elements specified in the NDMS are designed to be platform, language, and implementation independent. This allows system developers to generate and retain discovery metadata using any implementation approaches, including using COTS products. As future enterprise discovery interface specifications are defined, programs should have the appropriate discovery metadata available for their data assets and will only be required to format this metadata in accordance with the interface specifications.

A.1.5. Extensible Markup Language (XML)

049. The Extensible Markup Language (XML) is a simple, very flexible text format, much like HTML, used to structure, store and to send information. XML was designed to describe data and to focus on what data is. XML is also playing an increasingly important role in the exchange of a wide variety of data on the Web and elsewhere.

050. Role of XML in the Web Services model is lies within communication. When one application talks to another to perform a web service, the application doing the talking must package the message it is sending in a format that is understandable by the listening application. XML is the format of the message content in this communication process.

051. The Extensible Markup Language tags provide information about a document's components. The Uniform Resource Identifiers contained in the XML tags expand the concept of Uniform Resource Locators (URLs) by adding IDs for objects, concepts and values that are not dependent on location.

A.2. INFORMATION MODELLING

052. The ability to share information is a key factor for military success. As such, NATO and National Information Systems have to provide the means for information exchange in all mission types. The basic resource for all information systems is data, which, through the right interpretation, becomes information, and knowledge in turn. As NNEC is considered the core theme for C3 systems within NATO transformation, a fundamental requirement is to work in the most effective manner through semantic interoperability at the data level for NATO/national C3 systems. The expanding missions of NATO involve consultation based on the sharing of information. Alliance members and partners are engaged in collective decision-making, with each nation retaining sovereignty and responsibility for its own decisions and taking action only on the basis of unanimity. In this environment, it is critically important that the Alliance members and partners have access to all shared information at the same time and that both the consultation process and the decisions taken are adequately documented. Information modelling and information management initiatives must be formalized throughout the NATO Enterprise to leverage the collective assets of NATO and national systems in support of information operations.

053. Information management is the handling of information acquired by one or many disparate sources in a way that optimizes access by all who have a share in that information or a right to that information. Information modelling establishes a conceptual schema that defines how the managed elements in an information environment are represented as a common set of objects and relationships between them. This allows multiple parties to exchange management information about these managed elements. Additionally, it provides means to actively control and manage these elements. By using a common model of information, management software can be written once and work with many implementations of the common model without complex and costly conversion operations or loss of information.

054. Appropriate Information management will enable:

- Awareness -- Products identified by metadata (keywords) and cataloged with a common schema providing a simple yet integrated query search for the right information (product);
- Access -- with information tags to define privileges; and,
- Delivery -- Assured delivery of the information product over the right network and to the right location.

055. This integrated approach to information modelling leverages the concepts of Net Centricity throughout all information resource providers and consumers in a coalition operation. Key components of this strategy include a dissemination capability, with associated management services, that directs end-to-end information flows throughout the NII in accordance with command policy. The NISP will contibute to the core technical model for systems designers to develop new platforms capable of the intensive compilation, cataloguing, caching, distribution, and retrieval of data necessary to provide the life cycle information management and necessary information sharing across NATO members.

A.3. NETWORK INFRASTRUCTURE

A.3.1. Background

056. With the NATO Network Enabled Capability Feasibility Study (NNEC FS) a new concept of ensuring service interoperability was introduced that complements and reuses the architectural views. This concept dubbed the Interoperability Performance Parameters (IPP), inspired by the US developed concept of Key Performance Parameters (KPP), forces the system architects and designers to specify a wider context of their capabilities sufficient to allow secure service interoperability in a Federation of Systems (FOS). The interfaces at which interoperability between separate infrastructure capabilities is to be managed are called the Service Inter Operability Points (SIOP).

057. The principle is that an individual capability needs to work seamlessly with and within a FOS. The infrastructure services in a FOS and the international interoperability interfaces are described in the context of the total C4ISR systems architecture, often referred to as the Overarching Architecture (OAA).

058. This section describes the NATO General-Purpose Segment Communication System (NGCS) Reference Architecture (RA). NGCS is part of the NII, representing the NATO owned capability. It provides the communication services and associated management and security services. Also it describes the timeframe for NGCS up to 2014, first implementations are in progress.

059. The major change to classical network infrastructures is the coherence and interoperability of infrastructure capabilities brought by different coalition partners that needs to be achieved. In the NNEC FS the concept of a Maturity Model was introduced to describe, qualify and quantify the different levels of infrastructure capability. Increasing levels of maturity are characterised by enhanced sets of services, performances, and support, including advances in the associated Doctrine, Organisation, Training, Materials, Personnel, Leadership, Facilities (DOTM-LPF) spectrum.

060. Interoperability of separate infrastructure capabilities is managed by the earlier mentioned concept of IPP. The IPP allows a more comprehensive description and specification of those parameters that are essential for providing scalable end-to-end services over combined infrastructure capabilities.

A.3.2. NGCS 2007 Target Architecture

061. A reference model of the baseline network infrastructure for NGCS RA is depicted in Figure A.2. This architecture is described in the NGCS RA ed1. At the time of writing the NSIE and the NATO IP Cryptographic Equipment / Secure Access Router (NICE/SAR) had not been fielded, but the implementation projects were in progress. The Bandwidth Manager Function (BMF) had been fielded.

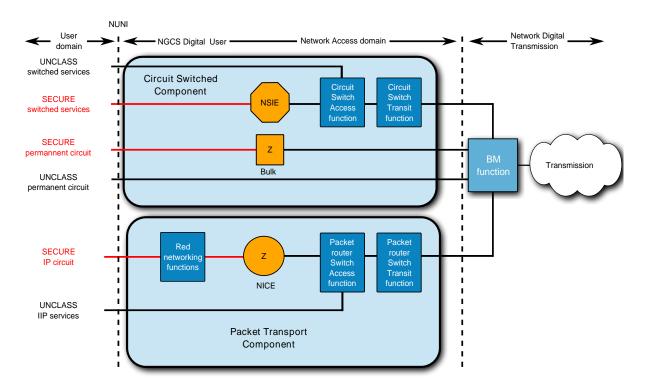


Figure A.2. NGCS Digital User-Network Access Reference Configuration

A.3.3. Communications & Networking

A.3.3.1. Internet Protocol Version 4 (IPv4)

062. Internet Protocol Version 4 (IPv4) is currently the dominant network layer protocol used in the communication between networked devices. IPv4 is a data-oriented protocol to be used on a packet switched inter-network (e.g., Ethernet). It is a best effort protocol in that it doesn't guarantee delivery. It doesn't make any guarantees on the correctness of the data; it may result in duplicated packets and/or packets out-of-order. All of these things are addressed by an upper layer protocol (e.g. UDP).

A.3.4. Construction of a robust IP-network infrastructure

063. Operational relevant service availability should be one of the main design criteria and operational evaluation criteria for the NGCS. Despite the migration of users onto a single network

and the introduction of significant additional complexity, e.g. QoS, the service availability has to be improved. Service availability and performance are exponents of infrastructure, organization, human aspects and others. The assessment of operational service readiness and performance is a structural activity required in the NGCS product life-cycle management. It should give input to transformational processes and for the development of Target Architectures (TA) that underpin infrastructure investment projects.

A.3.4.1. NGCS Overview

064. The NATO General Purpose Communications System (NGCS) has a Circuit Switched Component (CSC) and a Packet Transport Component (PTC). The services offered are presented at the NGCS User Network Interface (NUNI). The NGCS user-network access domain incorporates functions for user access of circuit switched functions and packet transport functions. The circuit switched component provides on-demand switched access and also access to semipermanent circuits. Both can be provided either in secure or non-secure modes. The packet transport component provides for both secure and non-secure IP access services.

065. A secure service offered by the network at the NUNI provides for interconnection within a single security domain. If telecommunication services are required for a second security domain, this is implemented by installation of another cryptographic device - e.g. NATO Secure ISDN Equipment (NSIE) offering bulk encryption or NATO IP Cryptographic Equipment (NICE) (with the associated RED networking functions). In order to provide greater throughput, more than one instance of this might exist for a single security domain.

066. In mid-term, a complete migration to a fully IP based network is planned for the NGCS.

A.3.4.2. Definition and implementation of a QoS architecture

067. In the public standardization bodies, e.g. IETF, ITU, ETSI, ANSI, many initiatives are ongoing regarding the specification of a global QoS architecture in support of network convergence. Likewise many government organizations are doing the same.

068. The operation and control of QoS enabled IP-services requires many new Operation and Support Systems as well as a thorough reassessment of the management organization.

069. The complexity and the novelty of IP QoS warrant a step-by-step introduction. The entities affected by the introduction are:

- The end-user;
- The applications;
- The infrastructure;
- The OSS/BSS;
- The policies;

• The third party providers, e.g. SP, NDN;

070. The introduction should follow the developments in the commercial sector, and each successive introduction step in NATO should be done when the technology is stable and mature. Nevertheless NATO may want to implement additional functionality like additional CoS to implement MLPP, but this always be based on an underlying commercial standard based QoS architecture. Eventually the QoS architecture must take account of the requirements in military tactical radio networks and future QoS enabled MANETs. It is envisaged however that commercial standards for wireless MANETs will be developed among others by the ZigBee Alliance

071. The model of spiral development should be applied. Each step is first tested in the laboratory (applications, infrastructure and OSS/BSS), evaluated against user requirements, operational issues, architectural principles, before it is gradually rolled out in the operational network.

072. Business cases for network convergence are becoming increasingly viable. As more and more services are uniquely available on IP and standardization for IP based service support is becoming mature, it becomes more cost effective to migrate an existing infrastructure based on TDM and IP bearers to a single IP-bearer service system. However, network convergence does not come for free. Following items and activities are required:

- Specification of a comprehensive set of Classes of Service (CoS) for the ultimate network, which can be initially collapsed to a basic set and further expanded with each implementation step.
- Definition of application mapping to telecommunications services (the CoS).
- Specification of CoS handling in the network
- NATO policy with the objective to have uniform QoS handling in the multinational network.
- Supporting management and control systems (NGOSS compliant) that need to be integrated in the total SLM complex.
- Proof of concept testing.

A.3.4.3. The migration of applications onto an IP-bearer

073. All the applications that are often traditionally carried on the CSC, i.e. telephony, switched VTC, leased line (for real-time data, for bandwidth pipe) need to be adapted so that they can also perform on an IP-bearer. Most of the applications require an QoS enabled IP infrastructure. In addition the connection oriented application services require call signalling, DNS, directory (for the gatekeeper) and resource reservation functionality. This infrastructure should be provided as a common core functionality for all application services requiring it. Target architectures for VoIP (SVoIP and VoSIP) and VTCoIP therefore need to be coordinated. For interoperability purposes NATO needs to standardize the signalling at the respective Service Interoperability Points.

A.3.4.4. Transition to IPv6

074. IPv6 is an enabler for establishing coalition wide connectivity in a network enabled NII. The transition strategy of the NATO CIS to IPv6 is described in [TN1088] ¹from which the top-level roadmap is repeated here in Figure A.3.

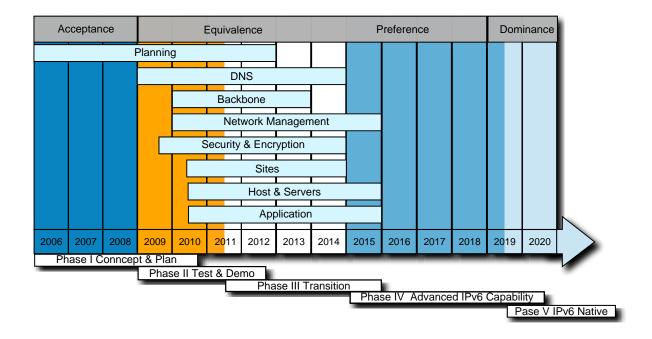


Figure A.3. Roadmap to IPv6

¹Derived from Technical Note 1088: NATO IPv6 Transition Plan, Preliminary Version, NC3A, June 2006

Index

Symbols

3rd Generation Partnership Project, 72, 72

A

ACM 2002-REST-TOIT, 58 Adobe Systems Incorporated EPS, 50 ISBN 0 200 175839 3, 50 PDFv. 1.4, 50 Postscript (level I and II), 50 AeroSpace and Defence Industries Association of Europe, 16 S1000D-I9005-01000-00, 15 ANSI ANSI ANSI/NIST-ITL, 96

С

Combined Communications and Electronic Board ACP 123A, 39, 39 ACP 133, 19 ACP 133 Suppl.1, 19 ACP 145(A), 41 ACP 190(B), 78 ACP 200, 74, 74 ACP 220, 42 ACP145, 14

D

DMTF DSP0004, 100 DSP0226, 97 DoD DIN: DOD_BTF_TS_EBTS_ Mar09_02.00.00, 95 DIN: DOD_BTF_TS_EBTS_ Nov06_01.02.00, 95 MIL-STD 188-110A, 81 MIL-STD 188-136, 86 MIL-STD 188-140A, 80 MIL-STD 188-141A, 81 MIL-STD 188-145, 80 MIL-STD 188-1582D, 86 MIL-STD 188-164, 77, 78 MIL-STD 188-165, 78 MIL-STD 188-181B, 77 MIL-STD 188-182A, 77 MIL-STD 188-183D, 84 MIL-STD 188-184, 84 MIL-STD 188-185, 77 MIL-STD 188-242, 82 MIL-STD 188-243, 83 MIL-STD 2401, 30 MIL-STD 2525B, 32, 32 MIL-STD 2525C, 32 MIL-STD 3011, 76 MIL-STD 6011C, 49, 73 MIL-STD 6016C, 49 MIL-STD 6016D, 49 MIL-STD 6040, 28 mil-std-2407, 10 **OTH-T**, 29

E

EBXML ebTA, 17, 17 ECMA ECMA-262, 36 ECMA-357, 36 ECMA-376, 51 Electronic Industries Association RS-530, 81 TIA/EIA-492000-A, 81 ERDAS, 27 ESRI shapefile, 30

Ι

IEEE 1278.1a, 44 802.1AB, 76 802.1D, 76 802.1Q, 76 P1516, 44 IETF

draft-cheshire-dnsext-multicastdns-06.txt,	RFC 2616, 52
61	RFC 2740, 66
draft-lee-sip-dns-sd-uri-03.txt, 18	RFC 2765, 67
RFC 1212, 98	RFC 2790, 99
RFC 1213, 98	RFC 2818, 53
RFC 1305, 45	RFC 2819, 99
RFC 1332, 70	RFC 2849, 20
RFC 1510, 94	RFC 2965, 53
RFC 1519, 68	RFC 3022, 67
RFC 1570, 70	RFC 3162, 94
RFC 1643, 99	RFC 3232, 61
RFC 1661, 70	RFC 3261, 42
RFC 1724, 67, 100	RFC 3308, 70
RFC 1771, 66	RFC 3315, 64
RFC 1772, 66	RFC 3344, 68
RFC 1812, 66	RFC 3501, 40
RFC 1831, 43	RFC 3633, 65
RFC 1939, 40	RFC 3646, 65
RFC 1990, 71	RFC 3768, 71
RFC 1994, 71	RFC 3775, 68
RFC 2003, 64	RFC 3776, 68
RFC 2021, 99	RFC 3898, 65
RFC 2030, 45	RFC 3913, 66
RFC 2058, 94	RFC 3973, 67
RFC 2080, 66	RFC 3977, 45
RFC 2083, 27	RFC 4023, 67
RFC 2126, 71	RFC 4025, 61
RFC 2205, 65	RFC 4287, 52
RFC 2236, 63	RFC 4514, 20
RFC 2328, 66	RFC 4750, 100
RFC 2362, 67	RFC 4752, 95
RFC 2392, 52	RFC 4918, 53
RFC 2428, 45	RFC 5023, 53
RFC 2452, 99	RFC 5246, 91
RFC 2453, 66	RFC 5280, 95
RFC 2454, 99	RFC 5555, 65
RFC 2460, 63	RFC 5568, 68
RFC 2465, 99	RFC 768, 71
RFC 2466, 99	RFC 791, 62
RFC 2472, 70	RFC 959, 44
RFC 2473, 67	RFC5519, 99
RFC 2474, 65	STD 89, 64
RFC 2545, 66	International Hydrographic Organisation
RFC 2557, 38	S-100, 33

International	Interface	Control	Working	26300, 51
Group				29500, 51
SCIP-210, 8				646, 51
SCIP-214, 8				7810, 87
SCIP-231, 8	39			7812, 95
ISO	1.5			7816, 87
10303-239,	15			8802-3, 76
12639, 26				9075, 21, 2
15893, 72				9594-8, 95
19107, 22				DIS 9660,
19109, 23				FCD 1802
19110, 23				FCD 1802
19112, 24				ITU, 72
19115, 31				G.726, 46 H.248.1, 42
19117, 32 19503, 56				H.248.1, 4 H.320, 42
4217, 36				H.320, 42 H.323, 41
4217, 30 8601, 38				T.120, 42,
8001, 38 8879, 52				T.30, 28
9735, 29				T.38, 28
ISO 15836:	2009 54			X.411, 89
ISO/IEC 19		96		A.H 11, 0)
ISO/IEC 19				J
ISO/IEC 19				Java Commu
ISO/IEC	// 012000	,,,,		JSR 152, 5
10589, 66				JSR 155, 5
10646, 37				JSR 206, 5
10918-4, 49)			JSR 315, 5
11172-3, 45				JSR 56, 55
12087-5, 47	7			
13818, 45				Μ
14443, 87				Microsoft, 51
14495-1, 27	7			Application
14496, 45				MS-SMB -
15408, 87				MSDN-OI
15444, 27				Multilateral I
15961, 15				MTIDP-SH
15962, 15				N .T
17363, 15				Ν
17364, 15				NATO, 21
17365, 15				AC/322(S0
17366, 15				AC/322-D
17367, 15				ACP 190(I
18026, 31				ACP 190(H
				APP-11, 23

0, 51 51 87 95 87 3,76 21, 21 8,95 660, 45 18023-1, 31 18025, 31 5,46 3.1, 42 0, 42 3, 41 , 42, 42 28 28 , 89

mmunity Process, 54 52, 55 55, 54 206, 54 315, 55 6, 55

oft, 51, 71 cation Note GC0165, 51 MB - v20100711, 43 N-ODBCPR, 21 eral Interoperability Program DP-SEAWG-ed3.0.10-annex-b, 22

21 22(SC/3)D(2007)0003-Rev5, 80, 80 22-D(2004)0024REV2, 90 190(B) NATO Supp 1A, 78 190(B) NATO Supp 2, 79 APP-11, 28, 28

NISP Volume 2

C-M(2005)0108, 16 com-sec-req, 86 draft, 18 MIL-STD 6020, 73 NC3A-RD-2977, 54 RTO-MP-IST-091, 90 STANAG 1059, 36, 36 STANAG 1116, 11 STANAG 1171, 11 STANAG 1317, 11 STANAG 1401, 8 STANAG 1456, 12 STANAG 2019, 32 STANAG 2103, 12 STANAG 2211, ed. 6, 32 STANAG 3764, 49 STANAG 3809, 10 STANAG 4061, 12 STANAG 4082, 12, 12 STANAG 4103, 12 STANAG 4140, 12 STANAG 4175 ed.4, 74, 74, 80, 80 STANAG 4197 ed.1, 81 STANAG 4203 ed.3, 81 STANAG 4204 ed.3, 82 STANAG 4205, 83 STANAG 4206 ed.3, 75 STANAG 4214 ed.2, 74 STANAG 4231 ed.4, 83 STANAG 4233, 86 STANAG 4246 ed.3, 83 STANAG 4285, 81 STANAG 4290 RD, 75 STANAG 4292, 83 STANAG 4312 ed.1, 29 STANAG 4312 ed.2. 29 STANAG 4329, 37 STANAG 4372 ed.3, 83 STANAG 4376 ed.1, 84 STANAG 4406, 14, 39 STANAG 4415, 82 STANAG 4444 ed.1 (Draft), 46, 76, 82 STANAG 4448 ed.1, 83 STANAG 4449 ed.1, 83

STANAG 4479 ed.1, 47 STANAG 4481 ed.1, 82 STANAG 4484 ed.2, 84, 84 STANAG 4485 ed.1, 85, 85 STANAG 4486 ed.2, 85, 85 STANAG 4522 ed.1, 86 STANAG 4538 ed.1, 82 STANAG 4539, 82 STANAG 4545 ed.1, 47 STANAG 4559 ed. 3, 47 STANAG 4564 ed.2, 31 STANAG 4575 ed. 3, 48 STANAG 4578 ed.2, 75 STANAG 4586, 74, 74 STANAG 4591, 46 STANAG 4606 ed.1, 85, 85 STANAG 4607 ed.3, 48 STANAG 4609 ed.3, 48 STANAG 4610, 50 STANAG 4622, 85 STANAG 4631, 39 STANAG 5000, 28 STANAG 5030 ed.4, 81 STANAG 5042, 32 STANAG 5046 ed.3, 75, 75 STANAG 5066 ed.2, 82 STANAG 5067 ed.1 (RD), 75 STANAG 5500, 28 STANAG 5511 Ed.7, 49, 73 STANAG 5516 Ed.4, 49, 49 STANAG 5522 Ed.2, J-Series, 49, 49 STANAG 5523, 18 STANAG 5525 ed.1, 25, 25 STANAG 5527, 13 STANAG 5602 ed.3, 47 STANAG 5616 ed.4, 73, 73 STANAG 6015, 13 STANAG 6022, 13 STANAG 7023 ed.4, 48 STANAG 7024 ed.2, 48 STANAG 7074, 9 STANAG 7085 ed.2, 74, 74 STANAG 7170 ed.2, 8 STANAG 7194 ed. 1, 47

stanag7098, 27 stanag7099, 26 stanag7163, 10 TIDE/NVG, 26 TIDE/TIDE-ID-RR, 54 TIDE/TIDE-ID-SP, 17, 55 TN-1313, 19 NIMA, 27 MIL-PRF 89005, 30 MIL-PRF-89045, 10 NIST FIPS 180-2 with Change Notice 1, 94, 94 FIPS 186-2 with Change Notice 1, 92, 92, 93

FIPS PUB 197, 91, 91 FS 1016, 46

0

OASIS, 42, 53, 53, 54, 58, 58, 88, 91 ProgrammersAPI_v2, 16 regrep-rim-3.0-os, 17 SAML 1.1, 88 uddi-v3.00-published-20020719, 16 wss-soap-message-security-1.0, 90 wss-username-token-profile-1.0, 90 wss-v1.1-errata-os-SAMLTokenProfile, 90 wss-v1.1-spec-os-KerberosTokenProfile, 90 wss-v1.1-spec-os-SwAProfile, 90, 91 wss-x509-token-profile-1.0, 90 ODMG ISBN 1-55860-647-5, 21 **OMG**, 60 c4i/2008-08-13, 36 dtc/2010-06-05, 53 formal/2002-12-06, 44 formal/2009-02-04, 36 **Open Applications Group** OAGIS, 15 **Open GIS Consortium** 06-050r3, 52 07-067r5, 34 08-007r1, 30 09-000, 8 09-026r1, 30

10-100r2, 30 OGC 01-024r1, 35 OGC 03-081r2, 34 OGC 04-038r1, 35 OGC 05-047r3, 34 OGC 05-078r4, 33 OGC 06-042, 33 OGC 07-006r1, 35 OGC 07-110r4, 35 OGC 07-147r2, 34 OGC 08-139r3, 10 OGC 09-025r1, 33 OGC 09-110r3, 33 OGC 10-090r3, 10 **Open Services Infra-Structure Initiative**, 53 OpenGL glspec40.Core.20100311, 35 OSF F201, 43

P

PS/SC Working Group pc-sc-spec, 87

R

RSA PKCS#1 v2.1, 93

S

SUN Microsystems java_card_kit-2_2_1-fr-spec, 87 JNDI, 54 JSR 221, 21 rmi-over-iiop, 44

Т

The Open Group C 112, 21 C310, 43 C702, 43 C706, 43 F209a, 43 P702, 95 T525, 59, 59, 59

W

W3C, 58 datetime, 38 draft, 18 NOTE-VML-19980513, 26 NOTE-wsci-20020808, 53 NOTE-wsdl-20010315, 55 REC-CSS1-20080411, 56 REC-html401-19991224, 52 REC-rdf-sparql-query-20080115, 17 REC-SVGMobile-20030114, 26 REC-WebCGM-20011217, 25 REC-ws-policy-20070904, 16 REC-xforms-20031014, 52 REC-xhtml1-20020801, 52 REC-xlink-20010627, 55 REC-xml-20040204, 55 REC-xml-infoset-20011024, 56 REC-xml-names-19990114, 56 REC-xml-stylesheet-19990629, 56 REC-xmlbase-20010627, 56 REC-xpath-19991119, 57 REC-xsl-20011015, 56 REC-xslt-19991116, 56 WD-exi-20070716, 57 WD-SVG12-20050413, 25 WD-xquery-20030502, 55 xkms2, 88 xmldsig-core, 91 xmlenc-core, 95 WAP Forum WAP-238-WML-20010911-a, 56 Web Services Interoperability Organisation, 52 ws-i, 57, 57, 57, 57 Wolrd Meteorological Organisation fm94, 13

Х

X Consortium X11R7.5, 43, 58